

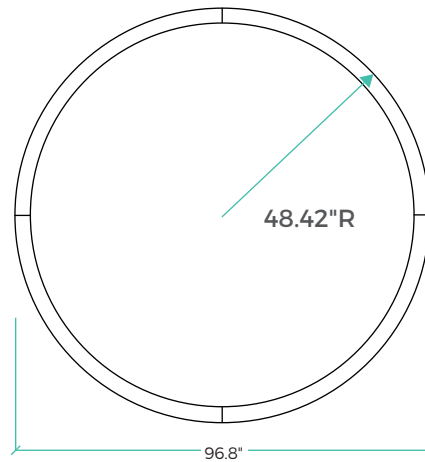


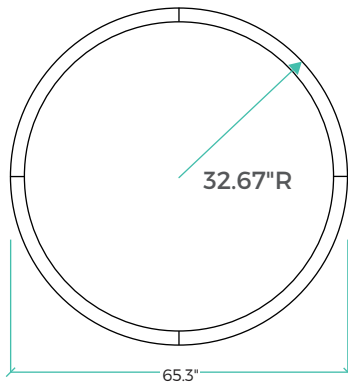

XTA | 2.5 Orbit Beam
33.8" Run Length 106.3"

XTA | 2.5 Orbit Beam 65.3"
Run Length 205"

XTA | 2.5 Orbit Beam 96.8"
Run Length 304.2"



DATA TABLE

Optic Module LED Engine	Proformax	CRI	90+
		Lumen Maintenance	82,000 Hours
Warranty		7 years	
Dimensions		Profile size 2.79" (2.81" with flange) x 3.93" Beam sizes - 106.3" x 106.3" / 65.3" x 65.3" / 96.8" x 96.8"	
Weight		XTA 2.5 Ellipse Recessed 56.1" (28.6lbs) / XTA 2.5 Recessed Slot 78.3" (55lbs) / XTA 2.5 Ellipse Recessed 87.6" (81.5lbs)	
IP Rating		IP20 (dry indoor application only)	
Compatible ceiling type		Suitable for (drywall) ceilings, metal pan, concrete, timber and T-bar grid ceilings	
Mounting		Wire suspensions, rod suspensions, surface mounting, ceiling mounting	

To create fully customisable variations of these profiles go to -

<https://xerolighting.com/products/xta-2-5-loop-recessed/>

XTA | 2.5 Orbit Recessed
specification sheet

