




## XTS | 3.0 Square

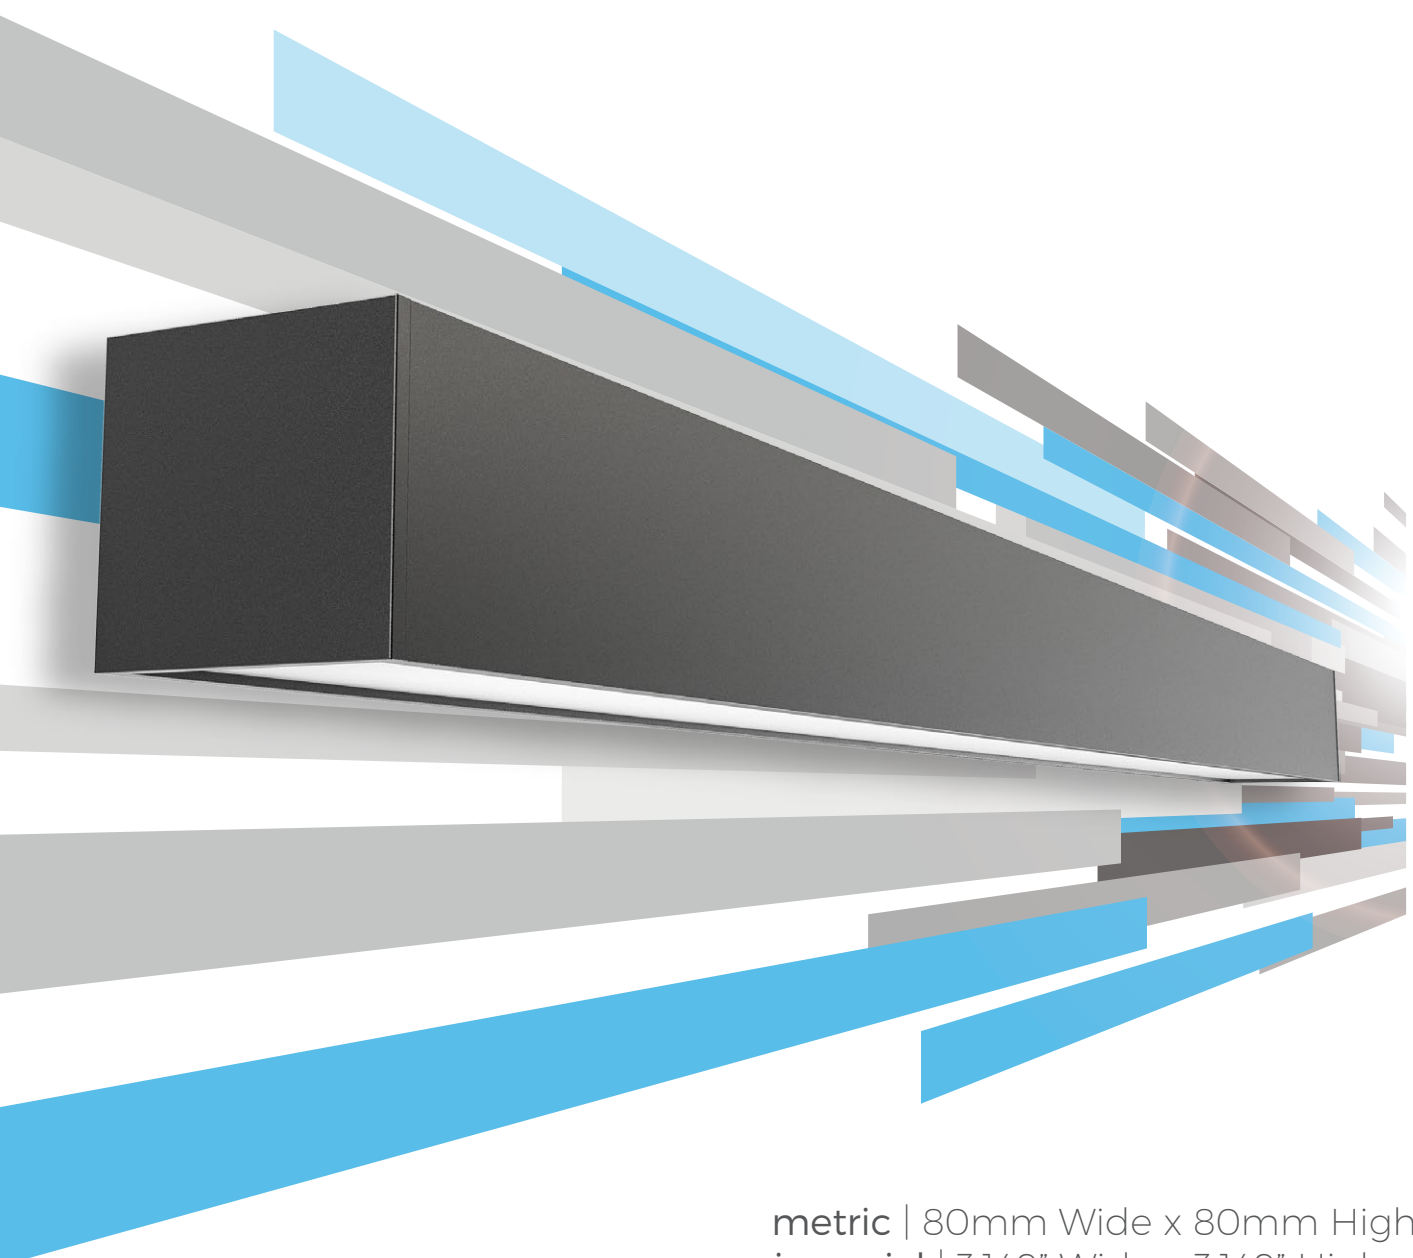

metric | 80mm Wide x 80mm High  
imperial | 3.149" Wide x 3.149" High

\*Illustration shows 'optional' screw-less end plate



**Xero Linear Lighting Systems**  
14 Voyager Circuit, Glendenning NSW Australia 2761

General Enquiries  
P: +61 2 8599 9788  
E: [headoffice@xerolighting.com](mailto:headoffice@xerolighting.com)



## XTS | 3.0 Square

### DATA TABLE

LED Engine	4 Ft Length 1120mm	Luminous Flux (Delivered Lumens)	LO 1900	HO 3500	
	Proformax	CRI:	90+		
		Lumen Maintenance:	82,000 Hours ( L80 B10 @ 35° )		
Warranty	Proformax	7 years			
Electrical	Power Consumption	Between 20 and 45w/m			
	Voltage input range	120 - 277V			
	Control methods	Dimming options for white light: 0-10V, DALI, DMX Optional RGB / Sunset Diming control DMX or DALI XI			
	Total harmonic distortion THD	9.8% max			
	Approvals	UL / CE / CCC / AS:NZS / EMC			
Physical	Dimensions	80 x 80mm			
	Weight per metre	3.21kg (7lbs) average weight			
	Housing	Aluminum Extrusion with anodised or powder-coated finish			
	End Plates	Screwed End Plates (Standard) / Screw-Less End Plates (Optional)			
	Downward diffuser	Frosted acrylic lens			
	Connections	Polarised electrical connection between sections			
	Compatible ceiling type	Suitable for drywall ceilings, metal pan, concrete, timber and T bar grid ceilings			
	Mounting	Field adjustable rollerball wire suspensions / rod suspensions / wall mounting / surface mount			
	Joiner options	Lit corner 90° / Cross 90° / Tee 90° / Straight 180° join			
	Operating temperatures	Proformax = -25°C to 35°C (-13°F to 95°F)			
	Environment	Dry indoor applications only			
	Minimum length adjustment	Proformax = 50mm			
	LED Board types	Proformax LED boards in 50 / 280mm / 560mm lengths Zhaga compatible			



Xero Linear Lighting Systems  
14 Voyager Circuit, Glendenning NSW Australia 2761

General Enquiries  
P: +61 2 8599 9788  
E: headoffice@xerolighting.com



# XTS | 3.0 Square

## PENDANT LENGTHS

DESCRIPTION	PENDANT LENGTHS										
	572	852	1132	1412	1692	1972	2252	2532	2812	3092	3372
total luminaire length in mm	23	34	45	56	67	78	89	100	111	122	133
'560 board multiples	1	1.5	2.0	2.5	2.0	3.5	4.0	4.5	5.0	5.5	6.0

## CONTINUOUS RUNS

DESCRIPTION	CONTINUOUS RUNS										
	3652	3932	4212	4492	4772	5052	5332	5612	5892	6172	6452
total luminaire length in mm	144	155	166	177	188	199	210	232	243	254	265
'560 board multiples	6.5	7	7.5	8.0	8.5	9.0	9.5	10.0	10.5	11.0	11.5

DESCRIPTION	CONTINUOUS RUNS										
	6732	7012	7292	7572	7852	8132	8412	8692	8972	9252	9532
total luminaire length in mm	276	287	298	309	320	331	342	353	364	375	386
'560 board multiples	12.0	12.5	13.0	13.5	14.0	14.5	15.0	15.5	16.0	16.5	17.0

## CUSTOM LENGTHS

Custom lengths are available in 1.96" [50mm] increments above the minimum pendant length of 22.51" [572mm]

XTS | 3.0 Square

## Bend Options



135°



cross 90°



Tee 90°



custom



corner 90°



ceiling to wall

## Optical Control



plexiglass



## Accessories and options



sensors / daylight  
harvesting



emergency packs



downlights

## Rollerball Suspension

The smart suspension system that can be mounted on any surface whether a flat or sloped ceiling or even a wall

## Axis geartray

This truly unique innovation adopts our revolutionary cam lock for quick and simple 'single person' installation. The system is also 'future proofed' by having the ability to easily upgrade as LED technology rapidly advances.



Xero Linear Lighting Systems  
14 Voyager Circuit, Glendenning NSW Australia 2761

General Enquiries  
P: +61 2 8599 9788  
E: headoffice@xerolighting.com

