

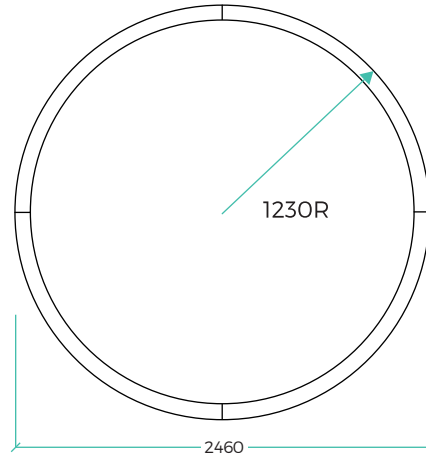


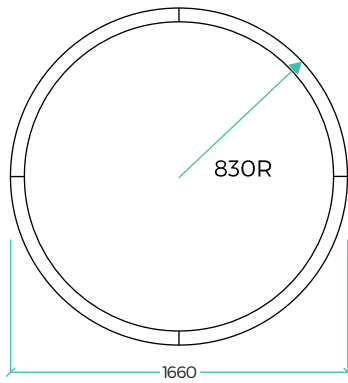

XTA | 2.0 Orbit Recessed 860
Run Length 2.702m

XTA | 2.0 Orbit Recessed 1660
Run Length 5.215m

XTA | 2.0 Orbit Recessed 2460
Run Length 7.728m



DATA TABLE

Optic Module LED Engine	Proformax	CRI	90+
		Lumen Maintenance	82,000 Hours
Warranty		7 years	
Dimensions		Profile size 60mm (86mm with flange) x 100mm Beam sizes - 860 x 860mm / 1660 x 1660mm / 2460 x 2460mm	
Weight		XTA 2.0 Ellipse Recessed 1426 (11.5kg (25.35bs) / XTA 2.0 Recessed Slot 1991 (23.5kg (51.80lbs) / XTA 2.0 Ellipse Recessed 2226 (35.5kg (78.26lbs)	
IP Rating		IP20 (dry indoor application only)	
Compatible ceiling type		Suitable for gyprock (drywall) ceilings, metal pan, concrete, timber and T-bar grid ceilings	
Mounting		Gyprock clips as standard	

To create fully customisable variations of these profiles go to -

<https://xerolighting.com/products/xta-2-0-loop-recessed/>

XTA | 2.0 Orbit Recessed
specification sheet

