

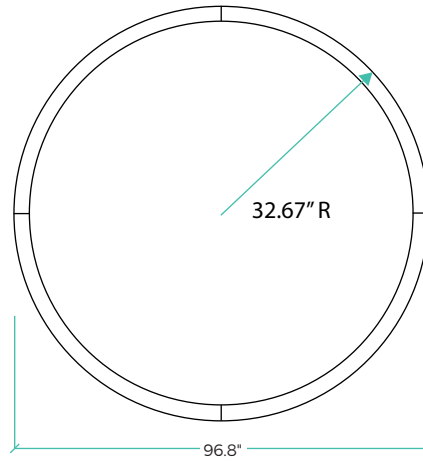


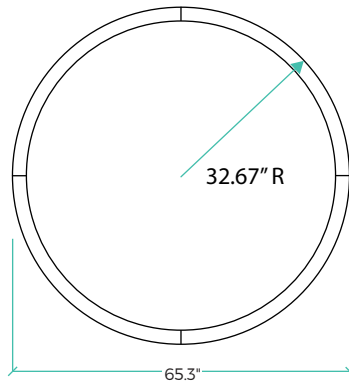

XTA | 2.0 Orbit Recessed  
33.8" Run Length 106.3"

XTA | 2.0 Orbit Recessed 65.3"  
Run Length 205.3"

XTA | 2.0 Orbit Recessed 96.8"  
Run Length 304.2"

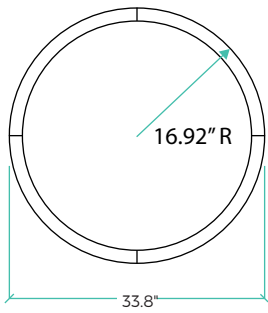

### DATA TABLE

Optic Module LED Engine	Proformax	CRI	90+
		Lumen Maintenance	82,000 Hours
Warranty		7 years	
Dimensions		(Profile size 2.36" x 3.15") Orbit sizes - 33.8" x 33.8" / 65.3" x 65.3" / 96.8" x 96.8"	
Weight		XTA   2.0 Orbit Slot 33.8" (18.95lbs) / XTA   2.5 Ellipse Slot 65.3" (41.22lbs) / XTA   2.5 Orbit Slot 96.8" (142lbs)	
IP Rating		IP20 (dry indoor application only)	
Compatible ceiling type		Suitable for (drywall) ceilings, metal pan, concrete, timber and T-bar grid ceilings	
Mounting		Wire suspensions, rod suspensions, surface mounting, ceiling mounting	

To create fully customisable variations of these profiles go to -

<https://xerolighting.com/products/xta-2-0-loop-slot/>

XTA | 2.0 Orbit Slot  
specification sheet

