

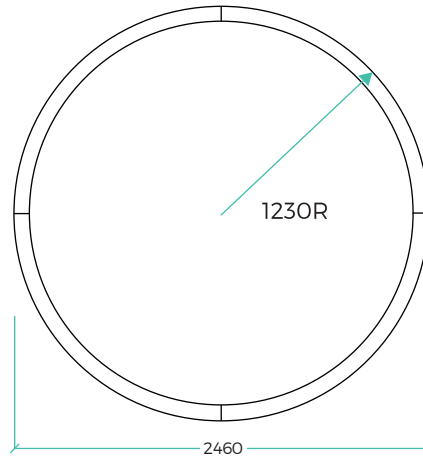


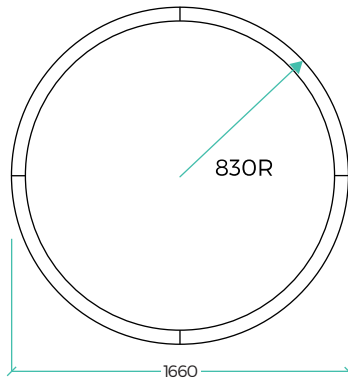

XTA | 2.5 Orbit Beam 860
Run Length 2.702m

XTA | 2.5 Orbit Beam 1660
Run Length 5.215m

XTA | 2.5 Orbit Beam 2460
Run Length 7.728m

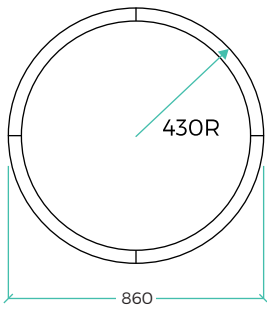

DATA TABLE

| | | | |
|-------------------------|-----------|---|--------------|
| Optic Module LED Engine | Proformax | CRI | 90+ |
| | | Lumen Maintenance | 82,000 Hours |
| Warranty | | 7 years | |
| Dimensions | | (Profile size 71mm x 100mm) Orbit sizes - 860 x 860mm / 1660 x 1660mm / 2460 x 2460 | |
| Weight | | XTA 2.5 Orbit Slot 860 (10.8kg (23.8lbs)) / XTA 2.5 Ellipse Slot 1660 (21kg (46.2lbs)) / XTA 2.5 Orbit Slot 2460 (30.8kg (67.9lbs)) | |
| IP Rating | | IP20 (dry indoor application only) | |
| Compatible ceiling type | | Suitable for gyprock (drywall) ceilings, metal pan, concrete, timber and T-bar grid ceilings | |
| Mounting | | Wire suspensions, rod suspensions, surface mounting, ceiling mounting | |

To create fully customisable variations of these profiles go to -

<https://xerolighting.com/products/xta-2-5-loop-slot/>

XTA | 2.5 Orbit Slot
specification sheet

