

XERO
TECHNOLOGY
ADVANCED 

XTA | 3.0 Square

metric

80mm Wide x 80mm High

imperial

3.149" Wide x 3.149" High

The industry's best profiles

Xero Linear Lighting Systems introduces the Xero Technology Advanced (XTA) series.

XTA brings together the best available technology for any linear lighting system. This includes 'lumiSEAL' a complete light leak free system that incorporates 'ConSEAL' a patented end plate with hidden gaskets in all IP versions and 'Speed-Connect' a fast easy to assemble tool-less joining system that minimises installation time and additional skilled labour.

The technologically advanced XTA series also includes 'AXIS' a unique gear tray system that is completely upgradable and removable allowing, LED components to be easily accessed for end of life replacement, upgrade or maintenance. Axis gear trays have a cam latch that is the fastest in the industry to remove and requires no tools.

The XTA series uses Xero's exclusive boards and drivers - 'Xeramix 1' with an industry leading 10 year warranty that has unmatched colour quality throughout life includes combined HE / HO board with 114k hour life to L90 B10. Optional 'Xeramix R' available with 15 year warranty, 1M hours at L70 B10. All XTA profiles are incrementally length adjustable by 1mm increments.

UL / CE / AUS/NZS standards approved Universal 120-277v input, site selectable drive current for variable output 'on-the-fly'. Partner this with the high end details such as laser etched CNC machined end plates, micro prism diffuser with UGR19 and high LOR, white optic louvres and dot free diffusion options and excellent thermal tolerance.

XERO is truly linear lighting redesigned

higher performance longer life

The XTA | 3.0 Xero Linear Lighting System brings high-quality dot free illumination to commercial and institutional interior environments. Featuring the latest generation of LED technology, The XTA | 3.0 is the perfect choice for offices, retail and public spaces with clean, uninterrupted lines of light that comes from Xero's exclusive patent 'SpeedConnect' System

Xeramix LED light engines are LED boards that utilise ceramic based LED chips that provide outstanding light quality over the LIFE of the boards. The LED light engines have 114,000 hour life to L90 B10 @ 50°C. This performance is unmatched. For more information on the Xeramix LED light engines and the difference between plastic and ceramic LED's please visit xeramix.com

Xero Linear Lighting Systems offers a 7 year warranty using Proformax light engines to the original purchaser for the XTA series of profiles. For more information on warranty visit www.xerolighting.com/warranty

Xero Linear Lighting Systems extends an (industry leafull 10 year warranty using Xeramix1 light engines to the original purchaser for the XTA series of profiles. For more information on warranty visit www.xerolighting.com/warranty

Xero Linear Lighting Systems extends a full 15 year warranty using XeramixR light engines to the original purchaser for the XTA series of profiles. For more information on warranty visit www.xerolighting.com/warranty

	>>	
	>>	
	>>	

General enquiries
 E headoffice@xerolighting.com
 W xerolighting.com
 To get in touch with your local Xero
 Distributor Visit www.xerolighting.com/contacts





LUMI  SEAL™

First of it's kind light-leak free luminaire

The Xero Linear Lighting Group brings yet another industry first complete 'light-leak-free' system where there are no light leaks in the usual places like end plates, diffuser expansion gaps and at joins where two or more pieces are connected together. all of this from the linear lighting system company that has raised the bar on what is possible with this extraordinary product.

The patented Lumi SEAL™ light leak free system incorporates -

CON  SEAL™

ConSeal is a patented end plate that provides hidden gaskets in all IP version luminaires

SPEED  CONNECT™

'Speed-Connect' a fast easy to assemble tool-less joining system that minimises installation time and additional skilled labour.

General enquiries
E lights@xerolighting.com
W xerolighting.co
To get in touch with your local Xero
Distributor Visit www.xerolighting.com/contacts



XERO
TECHNOLOGY
ADVANCED



XTA | 3.0 Square
indoor series IP20

1mm = the industry's smallest incremental length adjustment

All XTA profiles can be mounted wall-to-ceiling, wall-to-wall or any combination of both, this couples with an incremental length capability of 0.039" [1mm] gives the designer maximum flexibility with custom designs.

General enquiries
E lights@xerolighting.com
W xerolighting.com
To get in touch with your local Xero
Distributor Visit www.xerolighting.com/contact



The information contained within this specification sheet is for general information purposes only. While Xero aspires to keep the information up to date and correct, we make no representations or warranties of any kind about the accuracy, reliability, suitability or availability with respect to this information, products, services, or graphics contained in this specification sheet for any purpose.



Highly Configurable

All XTA products can be made with lit, or unlit, corners which provide the designer with a myriad of design options.

bend options



135°



cross 90°



tee 90°



custom



corner 90°




ceiling to wall



This truly unique innovation adopts our revolutionary cam lock for quick and simple 'single person' installation. The system is also 'future proofed' by having the ability to easily upgrade as LED technology rapidly


Toolless installation

The ease of speed without screws, tools or lost components whilst also avoiding accidental damage potentially caused by screwdrivers.

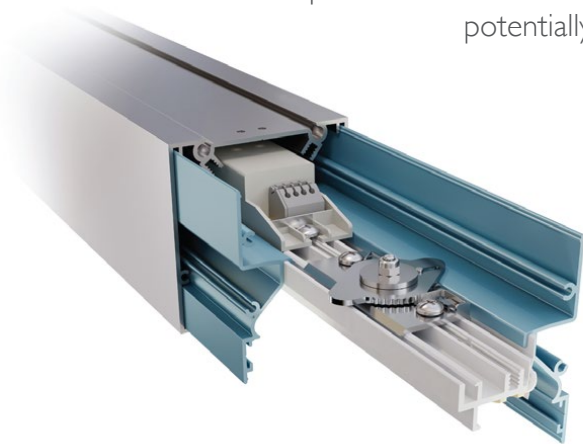

Cam lock

Ingenious patented locking cam allows for ease of installing and removing the complete gear tray. This allows for both simple maintenance but also upgrading in the future.





XTA | 3.0 Square
indoor series IP20



LED technology has rapidly advanced over the last decade with criteria of quality & quantity of light, efficiency, life and cost. The XERAMIX™ philosophy is targeting performance well within nominal specification to create luminaires in a class of their own.



Multi configuration arrays

Xeromix light engines are available in 25mm, 100mm, 280mm and 560mm lengths. These lengths derive from Xero's linear fixture algorithm, resulting in the ability to manufacture any luminaire length within 1mm increments.



Industry First

Xero XTA and XTI profiles are all backed by an industry leading 10 year warranty


Drive current dipswitch

A simple switch configures the total luminaire wattage, lumen output and efficiency without the need to change components. Xeromix light engines have been engineered to support the broad range of drive currents.



Constant pitch, uniform light

LED pitch is maintained across multiple gear trays, creating a uniform 'dot free' appearance on the diffuser for a highly desirable, continuous 'ribbon of light'.

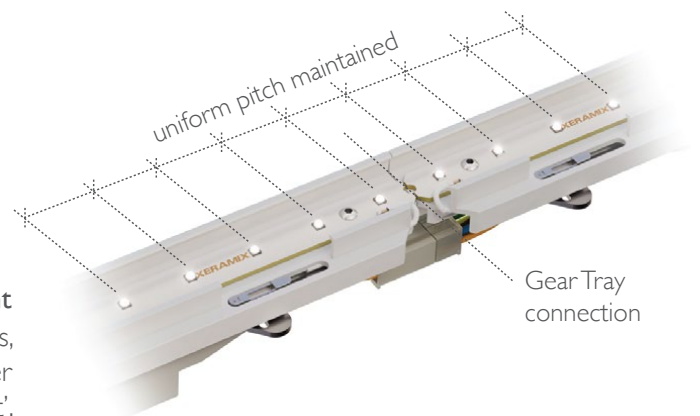


SPEED  CONNECT™

Our patented joining system is not only the fastest in the market, it incorporates LUMI-SEAL™ for a complete 'light leak free' join. Its multiple benefits for both installer and client's project sets it apart from the rest, reaching a new pinnacle of linear lighting.


Precision alignment

The inner sleeve coupled with roll pins provides precise multi-axial alignment.

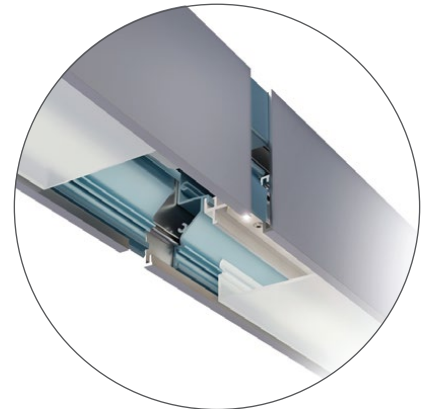


Inner sleeve benefits

- Allows for ease of mounting and alignment between sections
- Works as a reflector system for maximum light emission
- No separate parts to locate or be misplaced
- Does not require onsite assembly of gear trays

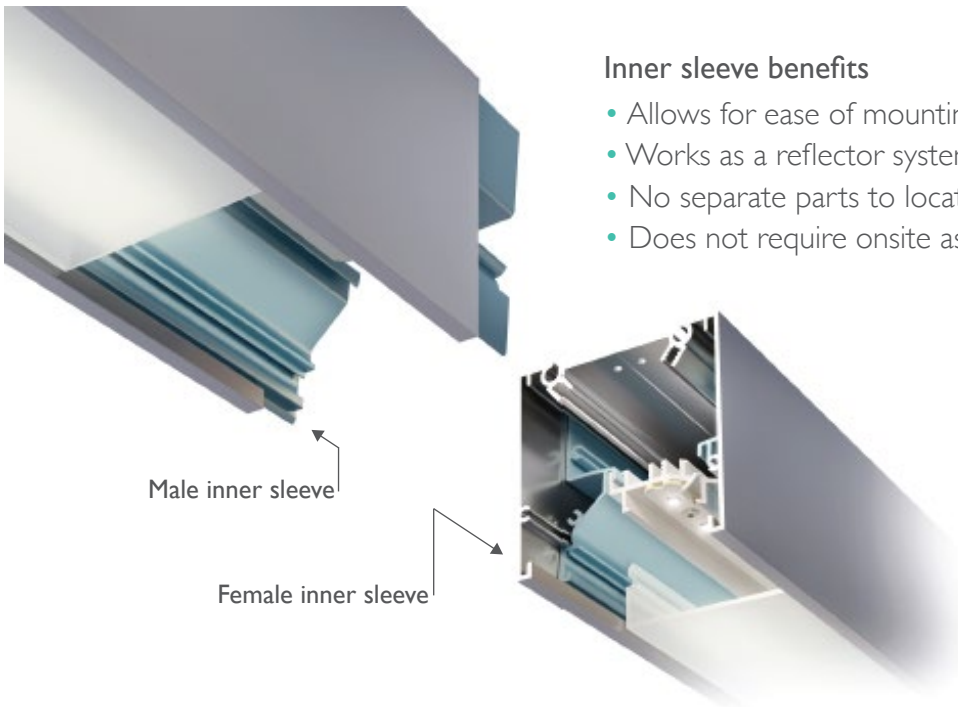


Rollerball Suspension™

The smart suspension system that can be mounted on any surface, whether a flat or sloped ceiling, or even a wall. Height adjustment is done at the luminaire for fine tuning close to the ground. The flexibility of luminaire location allows complete freedom of lighting design.

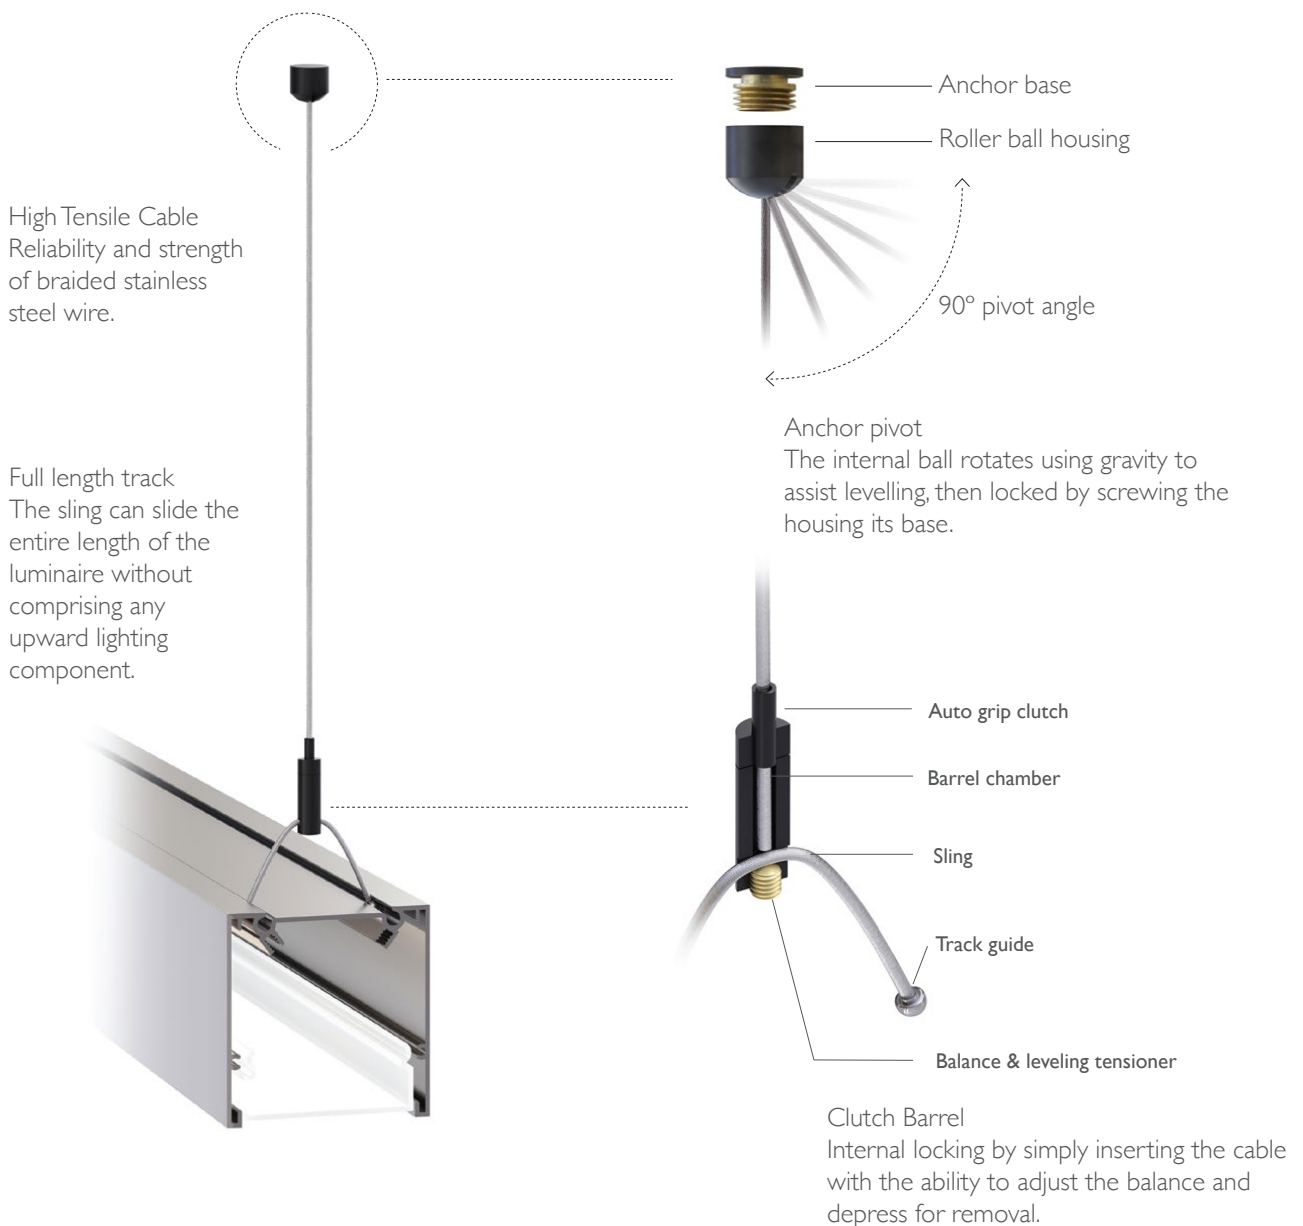


Linear lighting perfection has been realised, introducing patented Con-Seal™. The typical industry 'extrusion + flat end plate' has been superseded by our precision engineered endcap, complete with 'magnetic snap' cover plate that's nothing short of impressive.

Precision Endcap
Considerable ingenuity has interfaced the main extrusion, gear tray, inner sleeve, diffuser, gasket suspension and cover plate all together in this single component.



Tolerance gutter
Allows for thermal expansion and contraction of the diffuser material.



Magnetic cylinder
The cover plate magically snaps into position with ease.

Pin perfect alignment
Internal check pins and mounting screws ensure extrusion shape and structure integrity.





XTA | 3.0 Square

metric 80mm Wide x 80mm High

imperial 3.149" Wide x 3.149" High

technical data

DATA TABLE

LED Engine	4ft Length 1120mm	Luminous Flux (Delivered Lumens)	LO	HO	
			1900	3500	
	Xeramix	CRI	80+		
		Lumen Maintenance:	114,000 Hours (L90 B10 @ 50°)		
	Proformax	CRI:	90+		
		Lumen Maintenance:	82,000 Hours (L80 B10 @ 35°)		
Warranty	Xeramix	10 years			
	Proformax	7 years			
Electrical	Power Consumption	Between 20 and 45w/m			
	Voltage input range	120 – 277V			
	Control methods	Dimming options for white light: 0-10V, DALI, DMX Optional RGB / Sunset Dimming control DMX or DALI XI			
	Total harmonic distortion THD	9.8% max			
	Approvals	UL / CE / CCC / AS:NZS / EMC			
Physical	Dimensions	80mm Wide x 80mm High (3.149" x 3.149")			
	Weight per metre	3.1kg (6.8lbs) average weight			
	Distribution	Symmetric / Asymmetric			
	Housing	Aluminium Extrusion with anodised or powder-coated finish			
	Diffuser	Frosted acrylic lens / Polycarbonate lens / microprism lens / white optic low brightness louvre			
	Connections	Speed connect joining system with polarised electrical connection between sections			
	Compatible ceiling type	Suitable for gyprock (drywall) ceilings, metal pan, concrete, timber and T-bar grid ceilings			
	Mounting	Field adjustable rollerball wire suspensions / rod suspensions / wall mounting / surface mount			
	Joiner options	Lit corner 90° / Cross 90° / Tee 90° / Straight 180° Join			
	Operating temperatures	Xeramix = -25°C to 50°C (-13°F to 140°F) Proformax = -25°C to 35°C (-13°F to 95°F)			
	Environment	Dry indoor applications only			
	Minimum length adjustment	Xeramix = 1mm Proformax = 25mm			
	LED Board types	Xeramix LED boards in 25 / 100 / 280 / 560mm lengths Zhaga compatible Proformax LED boards in 50 / 280mm / 560mm lengths Zhaga compatible			

PENDANT LENGTHS

DESCRIPTION	PENDANT LENGTHS										
luminaire length	585	863.60	1143.00	1422.40	1701.80	1981.30	2260.60	2540.00	2819.40	3098.80	3378.20
inches	23	34	45	56	67	78	89	100	111	122	133
'560 board multiples	1	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0

CONTINUOUS LENGTHS

DESCRIPTION	CONTINUOUS RUNS										
total luminaire length	3657.60	3937.00	4216.40	4495.80	4775.20	5054.60	5334.00	5892.80	5892.80	6172.20	6451.60
inches	144	155	166	177	188	199	210	232	232	243	254
'560 board multiples	6.5	7	7.5	8.0	8.5	9.0	9.5	10.0	10.5	11.0	11.5

DESCRIPTION	CONTINUOUS RUNS										
total luminaire length	3657.60	3937.00	4216.40	4495.80	4775.20	5054.60	5334.00	5892.80	5892.80	6172.20	6451.60
inches	144	155	166	177	188	199	210	232	232	243	254
'560 board multiples	6.5	7	7.5	8.0	8.5	9.0	9.5	10.0	10.5	11.0	11.5

CUSTOM LENGTHS

CUSTOM LENGTHS
custom lengths are available in 0.0393701" [1mm] increments above the minimum pendant length of 23" [585mm]

Optical control

All XTA profiles come with many diffuser options for glare control in any application



polycarbonate



plexiglass




microprism




optic white
louvre

Accessories and options




XM3 Canopy
Kit



sensors / daylight
harvesting



emergency packs



downlights



The Xero Configurator allows you to design and build your customised lighting system. To ensure that your profile specifically caters to your project application follow the simple 8 step build process to obtain your unique DNA code. Select your profile, choose your colour, length, gear tray, output, colour temperature, mounting requirement and choose from the selection of extras

The X-Configurator can be accessed at xerolighting.com/xconfigurator

Project Specification Sheet

XTA 3.0 Beam

Name: Joe Smith
Company: Joe Smiths Company
Email: joesmith@joesmithcompany.com.au

Project: A very big project

Fitting Type: S1

Series	XTA - Advanced
IP Rating	IP55
LED Board	Xeramix X1
Size	3.0 Inches Down / 1.5 Inches Up
Shape	Beam
Light Output	Up / Down
Diffuser	Plexiglass Down / Parabolic Louver Up
Colour Temp	3000K Down / 5000K Up
Drive Current	Drive Current Down / Drive Current Up
Total Light	Total Light Down / Total Light Up
Total Power	Total Power Down / Total Power Up
Efficiency	Efficiency Down / Total Power Up

Copy and Paste into your project specification

SPECIFICATION TEXT
Copy and Paste into your project specification

Type xx - XXM Xero XTA | 3.0 Square with Micro Prism diffuser, Xeramix I LED light engine, 3000°K, 50°C ambient temperature, L90 B10 14 hour life, 275Ma drive current. Efficacy of 512 lumens per watt delivered. Fitting comes complete with Speed-Connect joining system, ConSeal end plates and Lumiseal. Wire suspended with rollerball suspension system.

RE - CONFIGURE THIS SPECIFICATION
This project specification sheet has been generated with X Configurator. Click below to reconfigure and generate a new specification sheet.

[Configurator](#) [Click to re-configure](#)

ADELAIDE | AUCKLAND | BRISBANE | CHRISTCHURCH | DUNEDIN | HONG KONG
KUALA LUMPUR | SYDNEY | MELBOURNE | PERTH | USA | WELLINGTON

XEROLIGHTING.COM

to access the X-configurator please visit www.xerolighting.com/xconfigurator

General Specifications:

LED luminaries shall employ ceramic based LED's with ZHAGA compliant boards

LED luminaries shall have removable gear trays

LED luminaries shall have upgradeable boards and drivers

LED luminaries shall have light leak free joining systems

LED Luminaires shall have 114,000 hour life to L90 B10 @ 35°C

LED Luminaires shall have colour spatial uniformity of 3 step macadam ellipse at end of life

LED luminaries shall have site adjustable drive current selection capability without the need for additional parts

LED Luminaires shall have thermal ambient temperature rating of 50°C



XTA | 3.0 Square

indoor series IP20

Mounting



Wire Suspended



Rod Suspended



Wall Mounted



Pendant



XTA | 3.0 Square

indoor series IP20

in a hurry?

Standing by and ready to ship.

The Xero Quickship Delivery program for North America, Australia and New Zealand, helps our clients meet tight project schedules without sacrificing quality or performance.

Offering a range of high-performance LED profiles with just a 10 day lead time.

Don't wait longer than you have to.

For more information consult the Xero Linear Lighting Systems Quickship Ordering Guide online now at

xerolighting.com/quickship/



XTA | 3.0 Square
indoor series IP20

meet the family


XTA | 3.0 Beam

The XTA 3.0 series is a wide body profile that has superior optics and Xero's patented Speed Connect system that enables truly "light leak free joins" and removable gear trays that can be upgraded in the future.



XTA | 3.0 Slot

The XTA 3.0 series is a wide body profile that has superior optics and Xero's patented Speed Connect system that enables truly "light leak free joins" and removable gear trays that can be upgraded in the future.

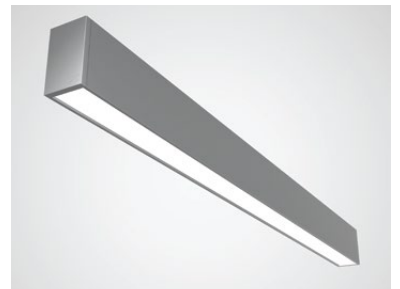


XTA | 3.0 Recessed

The XTA 3.0 series is a wide body profile that has superior optics and Xero's patented Speed Connect system that enables truly "light leak free joins" and removable gear trays that can be upgraded in the future.



XTA | 3.0 Square DI

The XTA 3.0 series is a wide body profile that has superior optics and Xero's patented Speed Connect system that enables truly "light leak free joins" and removable gear trays that can be upgraded in the future.

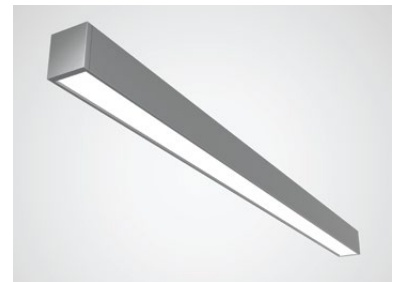

General enquiries
E lights@xerolighting.com W xerolighting.com
To get in touch with your local Xero
Distributor Visit [XEROContacts](#)



The information contained within this specification sheet is for general information purposes only. While Xero aspires to keep the information up to date and correct, we make no representations or warranties of any kind about the accuracy, reliability, suitability or availability with respect to this information, products, services, or graphics contained in this specification sheet for any purpose.