




# XTA|4.0 Square D/I | H/O (High Output)

Semi outdoor IP55

Size: 4.33" Wide x 4.33" High

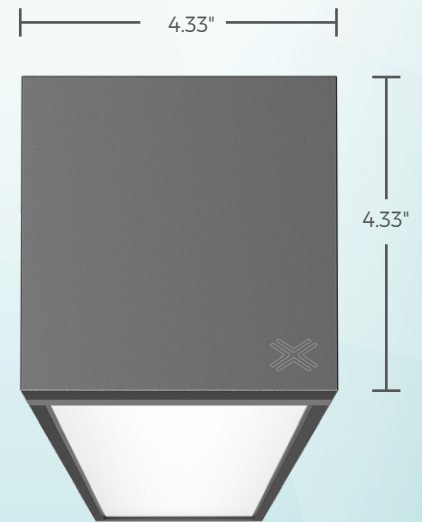

XTA | 4.0 Square D/I | H/O  
Semi outdoor IP55

DATA TABLE

<b>Output</b>	CRI	80+
<b>Warranty</b>	Proformax	7 years
<b>Electrical</b>	Voltage input range	120 – 277V
	Control methods	Dimming options for white light: 0-10V, DALI, DMX Optional RGB / Sunset Dimming control DMX or DALI XI
	Total harmonic distortion THD	9.8% max
	Approvals	UL / CE / CCC / AS:NZS / EMC
<b>Physical</b>	Dimensions	4.33" Wide x 4.33" High
	Weight	3.82 Lbs weight per feet
	Housing	Aluminium Extrusion with anodised or powder-coated finish Standard colours powder-coated: white/black/silver/ custom on request
	Upward diffuser	PlexiGlass as standard / Optional – Asymmetric Lens / Extra Wide Beam Lens
	Downward diffuser	PlexiGlass
	Connections	Speed connect joining system with polarised electrical connection between sections
	Compatible ceiling type	Suitable for drywall ceilings, metal pan, concrete, timber and T bar grid ceilings
	Mounting	Surface Mounting / Custom Mounting / Rod Suspension / Wall Mounting
	Joiner options	Lit corner 90° / Cross 90° / Tee 90° / Straight 180° Join
	Operating temperatures	ProformaxS – (-13°F to 140°F)
	Environment	IP55 (Not in direct sunlight)
	Minimum length adjustment	5.51"
	LED Board types	ProformaxS boards in 5.51" / 11.02" / 22.0" lengths Zhaga compatible
	Optional Extras	Emergency packs

XTA | 4.0 Square D/I | H/O  
Semi Outdoor IP55

Bend Options



135°



cross 90°



Tee 90°



custom




corner 90°




ceiling to wall

**Performance Optional**

Optical control Up (only)



Extra Wide Beam Lens



Asymmetric Lens

**Standard Optical Control**

Down & Up



plexiglass

Accessories and options



sensors / daylight harvesting



emergency packs



downlights



**Rollerball Suspension**

The smart suspension system that can be mounted on any surface whether a flat or sloped ceiling or even a wall

**Axis geartray**

This truly unique innovation adopts our revolutionary cam lock for quick and simple 'single person' installation. The system is also 'future proofed' by having the ability to easily upgrade as LED technology rapidly advances.

