




XERO

Linear Lighting Systems

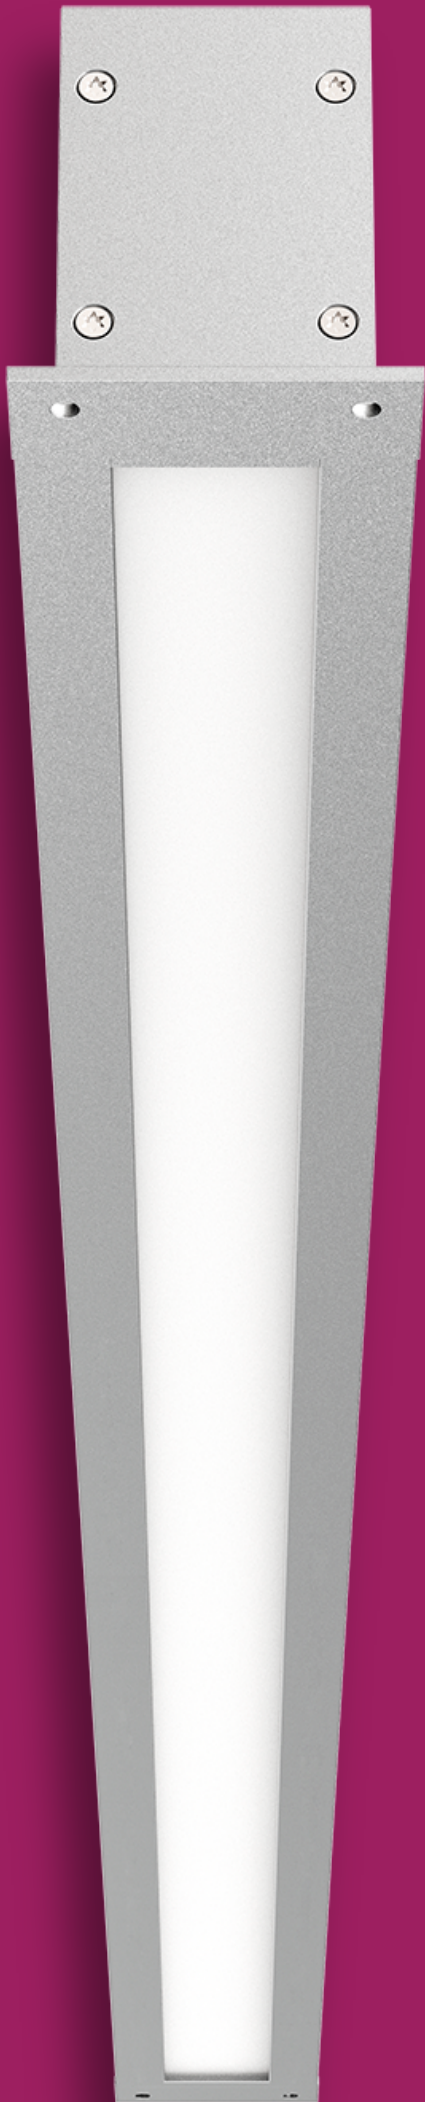

XERO  
TECHNOLOGY  
INFRASTRUCTURE RAIL

XTI·R

# XTI | 2.0 R Recessed IK II | IP66

Size

2.36" Wide x 3.93' High  
(3.03" inc flange)

PROFORMAX  
LIGHT ENGINES

STANDARD

QUALITY ASSURED

7 YEAR  
WARRANTY


## DATA TABLE

<b>Output</b>	CRI	80+
<b>Warranty</b>	ProformaxS	ProformaxS = 7 years
<b>Electrical</b>	Voltage input range	120 – 277V
	Control methods	Dimming options for white light: 0-10V, DALI, DMX Optional RGB / Sunset Dimming control DMX or DALI XI
	Approvals	UL / CE / CCC / AS:NZS / EMC
<b>Physical</b>	Dimensions	2.36" (3.03" including flange) Wide x 3.93" High
	Weight	3.33 lbs average weight per foot
	Housing	Aluminium Extrusion with anodised or powder-coated finish Standard colours powder-coated: white/black/silver/ custom on request
	Diffuser	Polycarbonate Opal Diffuser/ Clear Polycarbonate Diffuser / Parabolic Louvre
	Connections	Optional IP Rated polarised electrical connection between sections
	Compatible ceiling type	Suitable for drywall ceilings, metal pan, concrete, timber and T bar grid ceilings
	Mounting	Wire Suspension, Surface mount (with external bracket), Wall Blocks, End wall Bracket
	Joiner options	(Non lit) 90° Butt bend / Tee Butt bend
	Operating temperatures	ProformaxS (-13°F to 140°F)
	Environment	Luminaire IP66 (Not in direct sunlight, diffuser must not face upwards).
	IK rating	IK11
	Minimum length adjustment	5.51"
	LED board types	ProformaxS boards and drivers in 3.93" / 11.02" / and 22.04" Zhaga compatible
	Vandal-proof	Available with anti-vandal fasteners
	Optional extras	Lanyards / Emergency packs / Camera / Environmental Plugs / Thermal throttle / IOT connectivity / Anti-Graffiti / Self Cleaning Coating / Halogen Free Diffuser / Anti Bird Roosting


# XTI-R | 2.0 R Recessed

## IP66 | IK11

### XTI AVAILABLE LENGTHS



### EXAMPLE OF A STANDARD LENGTH COMBINATION

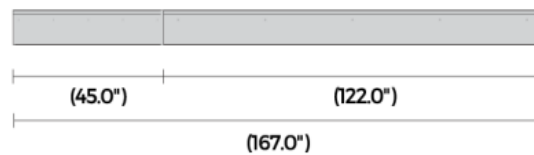

### CREATING LENGTHS WITH THE XTI SERIES

The XTI range IP66 | IK11 set lengths can be coupled together in any combination to achieve the desired length.  
Note: Custom lengths are also available - Please consult your local office for information


### CREATING LENGTHS WITH XTI Series IP66 IK11

The XTI series set lengths can be coupled together in any combination to achieve the desired length.  
Note: custom lengths are also available - please consult your local Xero office for information

### CUSTOM LENGTHS

Custom lengths are available in 0.98" increments

## JOINING CONFIGURATION

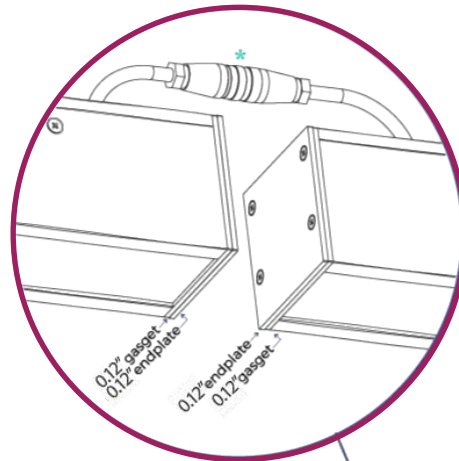

Separated

\*optional plug shown




Joined



Total length 22.75" to ∞

# Optical control

XTI profiles come with many diffuser options for glare control in any application




Polycarbonate  
Clear



Polycarbonate  
Opaque



Semi-specular  
Louvre



Optic white  
louvre



vandal proof



ewis speaker



emergency packs