

XERO
TECHNOLOGY
INFRASTRUCTURE



XTI | 3.0 Recessed IK II | IP66

Size


3.15" Wide x 3.15" High
(inc flange 3.78" Wide)

DATA TABLE


Output	CRI	80+
Warranty	ProformaxS	ProformaxS = 7 years
Electrical	Voltage input range	120 – 277V
	Control methods	Dimming options for white light: 0-10V, DALI, DMX Optional RGB / Sunset Diming control DMX or DALI XI
	Approvals	UL / CE / CCC / AS:NZS / EMC
Physical	Dimensions	3.15" Wide (3.78" inc flange) x 3.15" High
	Weight	2.90 lbs average weight per foot
	Housing	Aluminium Extrusion with anodised or powder-coated finish Standard colours powder-coated: white/black/silver/ custom on request
	Diffuser	Opaque Polycarbonate Diffuser / Clear Polycarbonate Diffuser / Parabolic Louvre
	Connections	Optional IP Rated polarised electrical connection between sections
	Compatible ceiling type	Suitable for drywall ceilings, metal pan, concrete, timber and T bar grid ceilings
	Mounting	Wire Suspension, Surface mount (with external bracket), Wall Blocks, End wall Bracket
	Joiner options	(Non lit) 90° Butt bend / Tee Butt bend
	Operating temperatures	ProformaxS (-13°F to 140°F)
	Environment	Luminaire IP66 (Not in direct sunlight, diffuser must not face upwards).
	IK rating	IK11
	Minimum length adjustment	5.51"
	LED board types	ProformaxS boards and drivers in 3.93" / 11.02" / and 22.04" Zhaga compatible
	Vandal-proof	Available with anti-vandal fasteners
Optional extras	Lanyards / Emergency packs / Camera / Environmental Plugs / Thermal throttle / IOT connectivity / Anti-Graffiti / Self Cleaning Coating / Halogen Free Diffuser / Anti Bird Roosting	

XTI | 3.0 Recessed IP66 | IK11

XTI AVAILABLE LENGTHS



EXAMPLE OF A STANDARD LENGTH COMBINATION

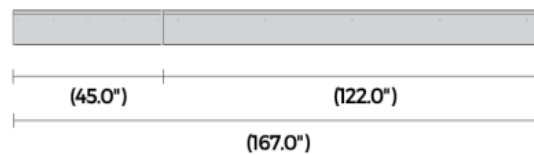

CREATING LENGTHS WITH THE XTI SERIES

The XTI range IP66 | IK11 set lengths can be coupled together in any combination to achieve the desired length.
Note: Custom lengths are also available - Please consult your local office for information

CREATING LENGTHS WITH XTI | 3.0 Series IP66 IK11

The XTI | 3.0 IP66 IK11 set lengths can be coupled together in any combination to achieve the desired length.
Note: custom lengths are also available - please consult your local Xero office for information


The XTI | 3.0 IP66 IK11 set lengths can be coupled together in any combination to achieve the desired length.

CUSTOM LENGTHS

Custom lengths are available in 0.98" increments


Measurements above exclude flange width.

JOINING CONFIGURATION

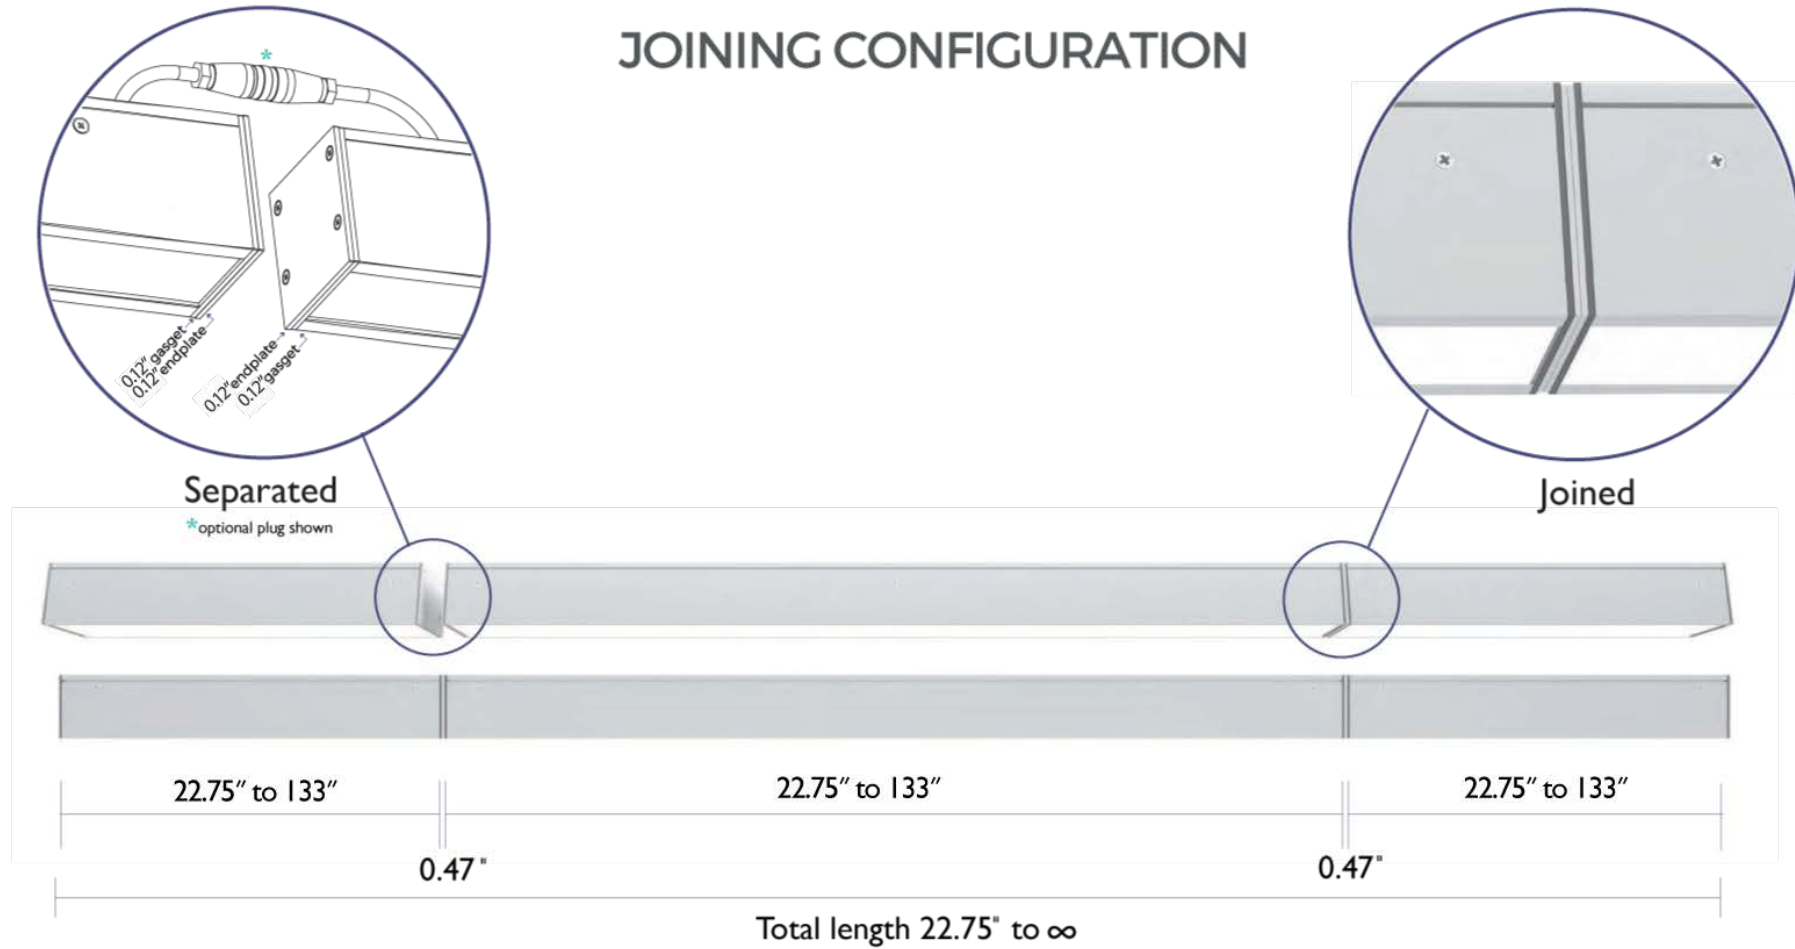

Optical control

XTI profiles come with many diffuser options for glare control in any application




Clear
Polycarbonate



Opal
Polycarbonate




Semi-specular
Louvre



Optic white
louvre



sensors / daylight
harvesting



emergency packs