

# XTI | 3.0 CB Square Cable Base

IK11 | IP66

Luminaire


Size

3.15" Wide x 2.00" High

Segregated  
Cable Base

Size

3.38" Wide x 3.26" High

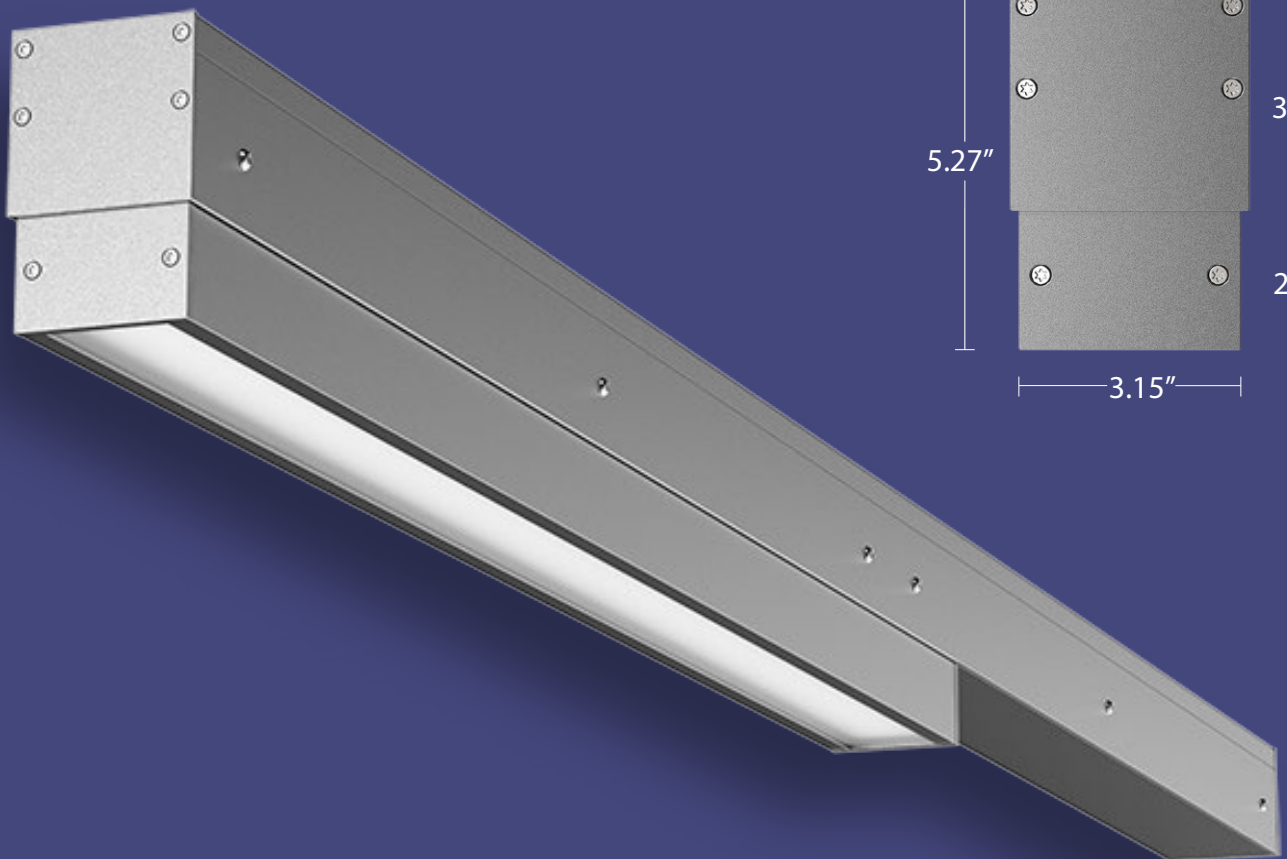


## DATA TABLE


<b>Output</b>	CRI	80+
<b>Warranty</b>	ProformaxS	ProformaxS = 7 years
<b>Electrical</b>	Voltage input range	120 – 277V
	Control methods	Dimming options for white light: 0-10V, DALI, DMX Optional RGB / Sunset Diming control DMX or DALI XI
	Approvals	UL / CE / CCC / AS:NZS / EMC
<b>Physical</b>	Dimensions	Luminaire 3.15" W X 2.16" H   Segregated Cable Base 3.38" W X 8.26" H
	Weight	4.62 lbs average weight per foot = (Combined average weight of Luminaire & Segregated Cable Base)
	Housing	Aluminium Extrusion with anodised or powder-coated finish and Segregated 3 Channel cable base
	Diffuser	Opaque Polycarbonate Diffuser / Clear Polycarbonate Diffuser / Parabolic Louvre
	Connections	Optional IP Rated polarised electrical connection between sections
	Compatible ceiling type	Suitable for drywall ceilings, metal pan, concrete, timber and T bar grid ceilings
	Mounting	Surface Mounting / Custom Mounting / Rod Suspension / Wall Mounting
	Joiner options	(Non lit) 90° Butt bend / Tee Butt bend
	Operating temperatures	ProformaxS (-13°F to 140°F)
	Environment	Luminaire IP66 (Not in direct sunlight, diffuser must not face upwards). Segregated Cable Base IP20
	IK rating	IK11
	Minimum length adjustment	5.51"
	LED board types	ProformaxS boards and drivers in 3.93" / 11.02" / and 22.04" Zhaga compatible
	Vandal-proof	Available with anti-vandal fasteners
Optional extras	Lanyards / Emergency packs / Camera / Environmental Plugs / Thermal throttle / IOT connectivity / Anti-Graffiti / Self Cleaning Coating / Halogen Free Diffuser / Anti Bird Roosting	

## XTI | 3.0 CB Square Cable Base

### XTI AVAILABLE LENGTHS



### EXAMPLE OF A STANDARD LENGTH COMBINATION

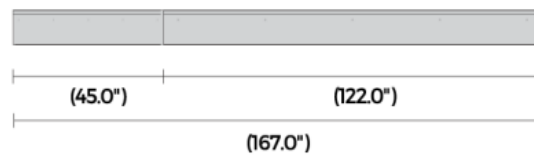

### CREATING LENGTHS WITH THE XTI SERIES

The XTI range IP66 | IK11 set lengths can be coupled together in any combination to achieve the desired length.  
Note: Custom lengths are also available - Please consult your local office for information

### CREATING LENGTHS WITH XTI | 3.0 Series IP66 IK11


The XTI | 3.0 IP66 IK11 set lengths can be coupled together in any combination to achieve the desired length.  
Note: custom lengths are also available - please consult your local Xero office for information

The XTI | 3.0 IP66 IK11 set lengths can be coupled together in any combination to achieve the desired length.

### CUSTOM LENGTHS


Custom lengths are available in 0.98" increments

## JOINING CONFIGURATION

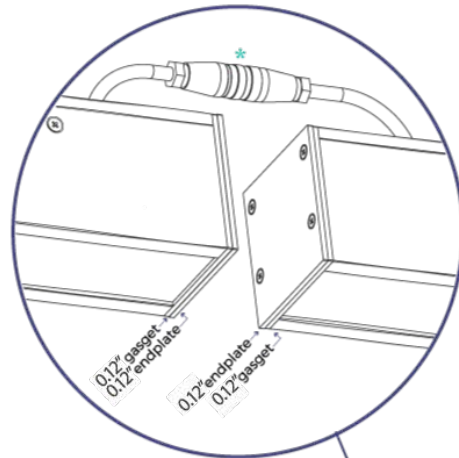


Separated

\*optional plug shown


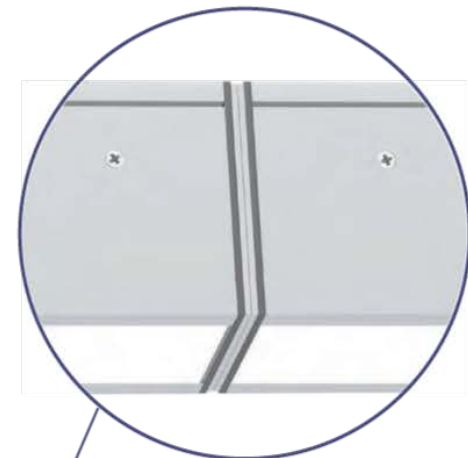


Joined

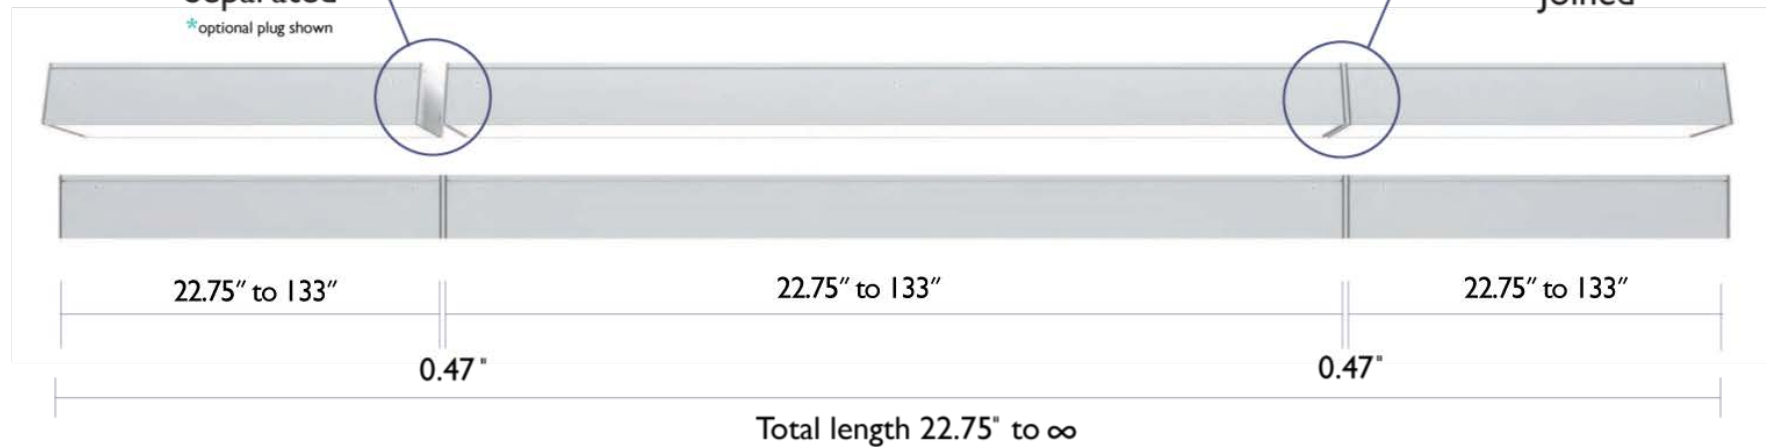

Total length 22.75" to ∞

# XTI | 3.0 CB Square Cable Base Dimensions

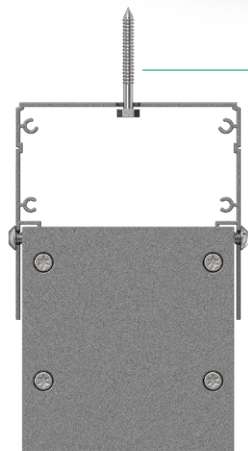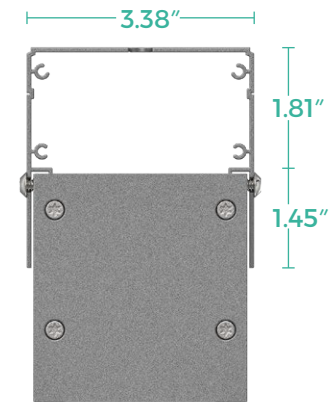

Fix fitting  
to required  
substrate  
  
(Fasteners not supplied)

90° Join

Example combination -  
(other combinations / configurations available)

## XTI | 3.0 CB Square Cable Base



IKIO+ Mounting Box

IKIO+ Cover  
Where / if required

Lighting profile:  
XTI | 3.0 Square IP66 IK10+  
Note: Luminaire can be 'hot swapped  
onsite to aid maintenance

Optional:  
Smoke detector  
EWIS Speaker  
Camera etc

## XTI | 3.0 CB Square (Cable Base)

Overall size: 3.38" Wide x 5.27" High



Luminaires can be placed where required or in a continuous row arrangement

L90 | B10 | 114K Hours | 122°F Ambient | IP66 | IK10+ | 7 Year Warranty

# Optical control

XTI profiles come with many diffuser options for glare control in any application




VO Low Smoke  
Polycarbonate



Polycarbonate



Semi-specular  
Louvre



Optic white  
louvre



sensors / daylight  
harvesting



emergency packs



pa speaker



ewis speaker



smoke detector



camera