

XERO  
TECHNOLOGY  
INFRASTRUCTURE




XTI | 4.0 Square  
(HO) High Output

IK11 | IP66

Size | 4.33" x 4.33"



XTI | 4.0 Square  
(HO) High Output

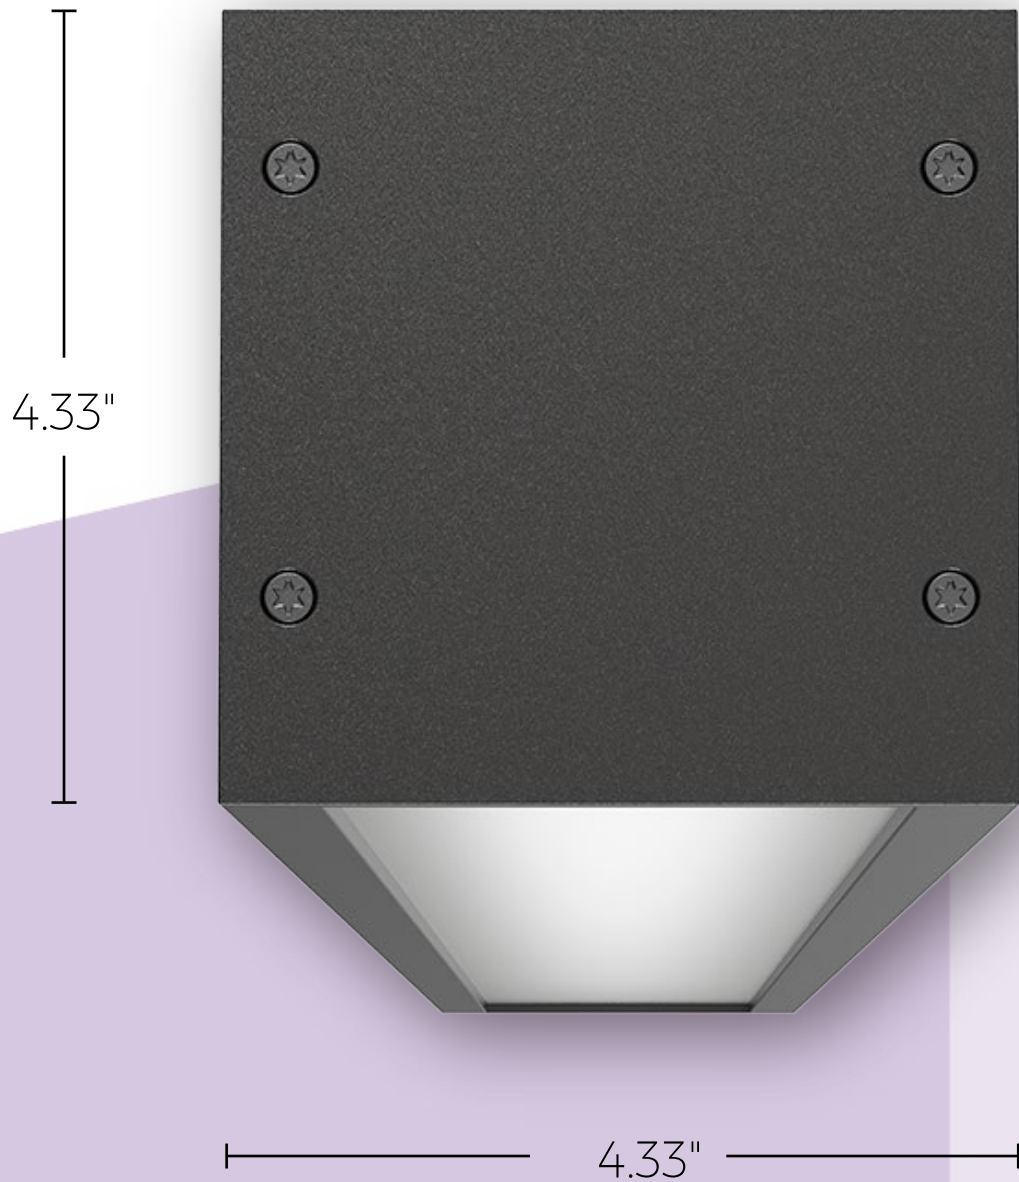


# XTI | 4.0 Square (HO) High Output

## DATA TABLE


<b>Output</b>	4ft Length	Delivered Lumens / LO = 4300 / HO = 8000
	CRI	80+
<b>Warranty</b>	Proformax	7 years
<b>Electrical</b>	Voltage input range	120 – 277V
	Control methods	Dimming options for white light: 0-10V, DALI, DMX Optional RGB / Sunset Dimming control DMX or DALI XI
	Total harmonic distortion THD	9.8% max
	Approvals	UL / CE / CCC / AS:NZS / EMC
<b>Physical</b>	Dimensions	4.33" High x 4.33" Wide
	Weight	3.02 lbs average weight per foot
	Housing	Aluminium Extrusion with anodised or powder-coated finish Standard colours powder-coated: white/black/silver/ custom on request
	Diffuser	PlexiGlass
	Connections	Optional IP Rated polarised electrical connection between sections
	Compatible ceiling type	Suitable for drywall ceilings, metal pan, concrete, timber and T bar grid ceilings
	Mounting	Surface Mounting / Custom Mounting / Rod Suspension / Wall Mounting
	Joiner options	(Non lit) 90° Butt bend / Tee Butt bend
	Operating temperatures	ProformaxS – (-13°F to 140°F)
	Environment	Luminaire IP66 (Not in direct sunlight, diffuser must not face upwards).
	Minimum length adjustment	5.51"
	LED Board types	ProformaxS boards in 5.51" / 11.02" / 22.0" lengths Zhaga compatible
	Optional Extras	Emergency packs

# XTI | 4.0 Square (HO) High Output

## XTI AVAILABLE LENGTHS



## EXAMPLE OF A STANDARD LENGTH COMBINATION

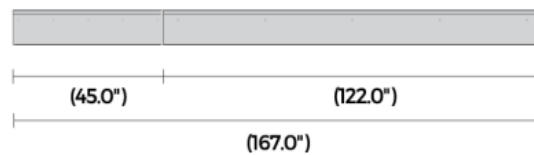

## CREATING LENGTHS WITH THE XTI SERIES

The XTI range IP66 | IK11 set lengths can be coupled together in any combination to achieve the desired length.  
Note: Custom lengths are also available - Please consult your local office for information

## CREATING LENGTHS WITH XTI | 4.0 Series IP66 IK11

The XTI | 4.0 IP66 IK11 set lengths can be coupled together in any combination to achieve the desired length.  
Note: custom lengths are also available - please consult your local Xero office for information

The XTI | 4.0 IP66 IK11 set lengths can be coupled together in any combination to achieve the desired length.


## CUSTOM LENGTHS

Custom lengths are available in 0.98" increments

# XTI | 4.0 Square (HO) High Output

## Optical control

XTI profiles come with many diffuser options for glare control in any application



Clear  
Polycarbonate



Opal  
Polycarbonate



XM3  
Canopy Kit



Vandal proof  
option



EWIS speaker  
option



LED  
downlight



Spitfire  
emergency



Sensors / daylight  
harvesting



Emergency  
packs