

XERO  
TECHNOLOGY  
INFRASTRUCTURE




XTI | 4.0 Square  
(HO) High Output

IK11 | IP66

Size | 4.33" x 4.33"



XTI | 4.0 Square  
(HO) High Output

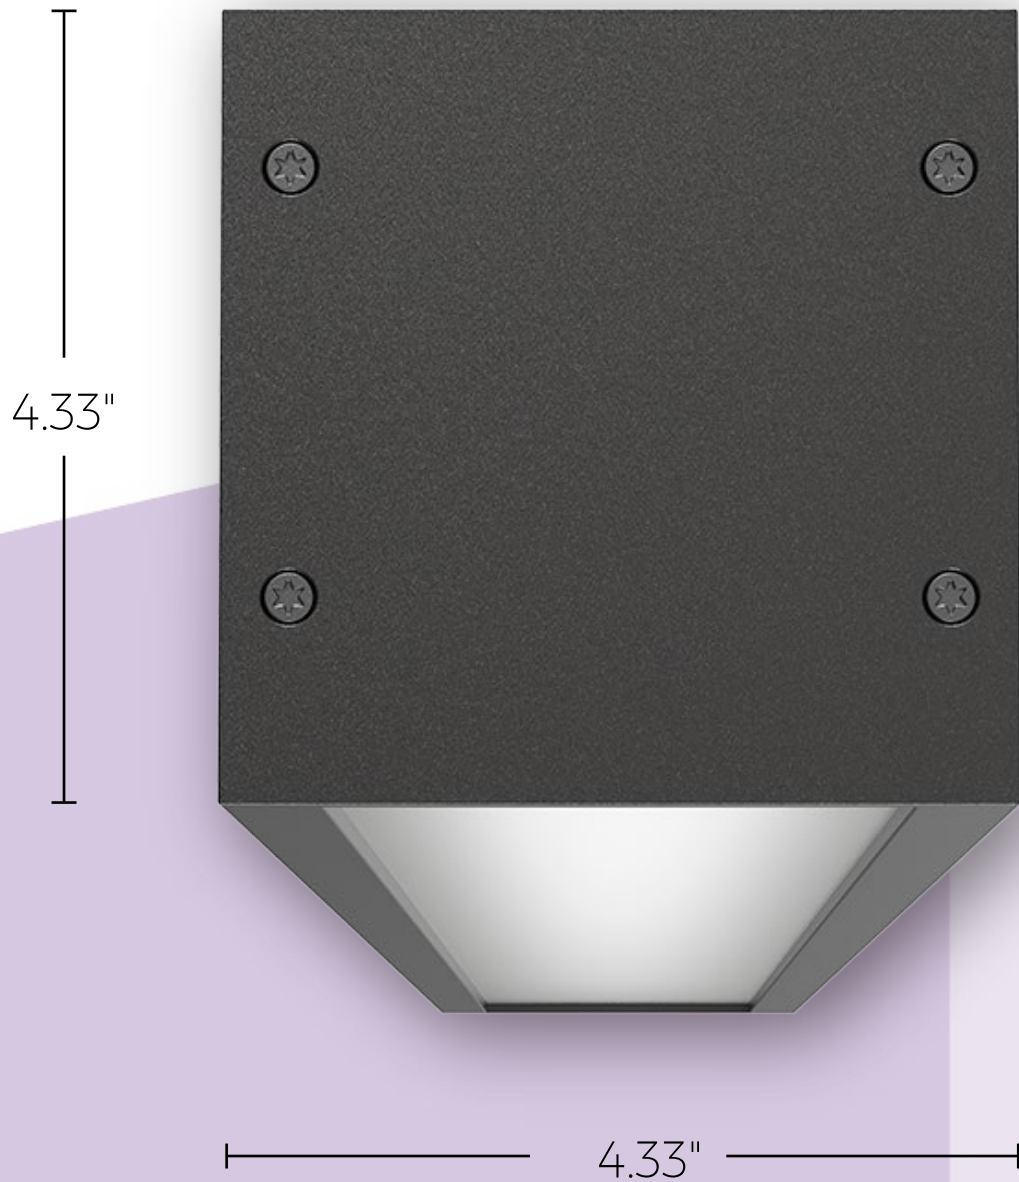


# XTI | 4.0 Square (HO) High Output

## DATA TABLE


<b>Output</b>	4ft Length	Delivered Lumens / LO = 4300 / HO = 8000
	CRI	90+
<b>Warranty</b>	Proformax S	7 years
<b>Electrical</b>	Voltage input range	120 – 277V
	Control methods	Dimming options for white light: 0-10V
	Total harmonic distortion THD	<10% max
	Approvals	UL / CE / CCC / AS:NZS / EMC
<b>Physical</b>	Dimensions	4.33" High x 4.33" Wide
	Weight	3.02 lbs average weight per foot
	Housing	Aluminium Extrusion with anodised or powder-coated finish Standard colours powder-coated: white/black/silver/ custom on request
	Diffuser	PlexiGlass
	Connections	Optional IP Rated polarised electrical connection between sections
	Compatible ceiling type	Suitable for drywall ceilings, metal pan, concrete, timber and T bar grid ceilings
	Mounting	Surface Mounting / Custom Mounting / Rod Suspension / Wall Mounting
	Joiner options	(Non lit) 90° Butt bend / Tee Butt bend
	Operating temperatures	ProformaxS – (-13°F to 95°F)
	Environment	Luminaire IP66 (Not in direct sunlight, diffuser must not face upwards).
	Minimum length adjustment	5.51"
	LED Board types	ProformaxS boards in 5.51" / 11.02" / 22.05" lengths Zhaga compatible
	Vandal-proof	Available with anti-vandal fasteners
	Optional Extras	Lanyards / Emergency packs

# XTI | 4.0 Square (HO) High Output

## XTI AVAILABLE LENGTHS



## EXAMPLE OF A STANDARD LENGTH COMBINATION

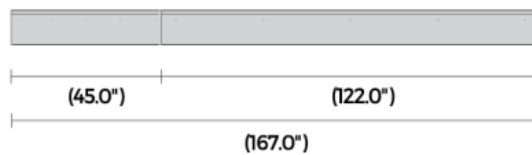

## CREATING LENGTHS WITH THE XTI SERIES

The XTI range IP66 | IK11 set lengths can be coupled together in any combination to achieve the desired length.  
Note: Custom lengths are also available - Please consult your local office for information

## CREATING LENGTHS WITH XTI | 4.0 Series IP66 IK11

The XTI | 4.0 IP66 IK11 set lengths can be coupled together in any combination to achieve the desired length.  
Note: custom lengths are also available - please consult your local Xero office for information

The XTI | 4.0 IP66 IK11 set lengths can be coupled together in any combination to achieve the desired length.


## CUSTOM LENGTHS

Custom lengths are available in 0.98" increments

# XTI | 4.0 Square (HO) High Output

## Optical control

XTI profiles come with many diffuser options for glare control in any application



Clear  
Polycarbonate



Opal  
Polycarbonate



Vandal proof  
option



Emergency  
packs