

XERO
TECHNOLOGY
INFRASTRUCTURE




XTI | 4.0 Square IK11 | IP66

Size | 4.33" x 4.33"



XTI | 4.0 Square

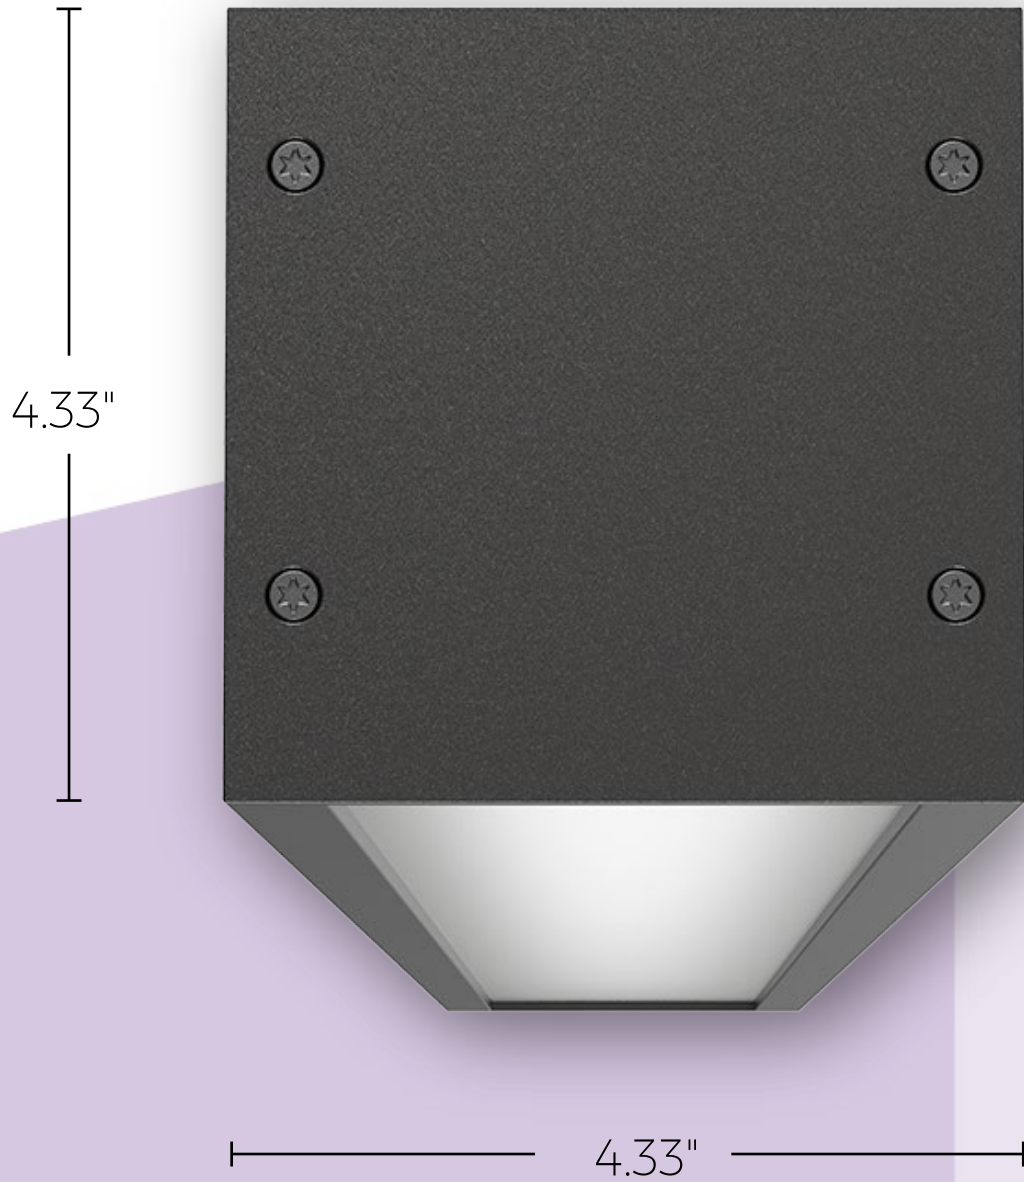


XTI | 4.0 Square

DATA TABLE

Output	CRI	90+
Warranty	Proformax S	7 years
Electrical	Voltage input range	120 – 277V
	Control methods	Dimming options for white light: 0-10V
	Total harmonic distortion THD	<10% max
	Approvals	UL / CE / CCC / AS:NZS / EMC
Physical	Dimensions	4.33" High x 4.33" Wide
	Weight per feet	3.02 lbs average weight per foot
	Housing	Aluminium Extrusion with anodised or powder-coated finish Standard colours powder-coated: white/black/silver/ custom on request
	Diffuser	PlexiGlass
	Connections	Speed connect joining system with polarised electrical connection between sections
	Compatible ceiling type	Suitable for drywall ceilings, metal pan, concrete, timber and T bar grid ceilings
	Mounting	Surface Mounting / Custom Mounting / Rod Suspension / Wall Mounting
	Joiner options	Lit corner 90° / Cross 90° / Tee 90° / Straight 180° Join
	Operating temperatures	ProformaxS – (-13°F to 95°F)
	Environment	Dry indoor application only IP20
	Minimum length adjustment	5.51"
	LED Board types	ProformaxS boards in 5.51" / 11.02" / 22.05" lengths Zhaga compatible
	Vandal-proof	Available with anti-vandal fasteners
	Optional Extras	Lanyards / Emergency packs


XTI | 4.0 Square

XTI AVAILABLE LENGTHS

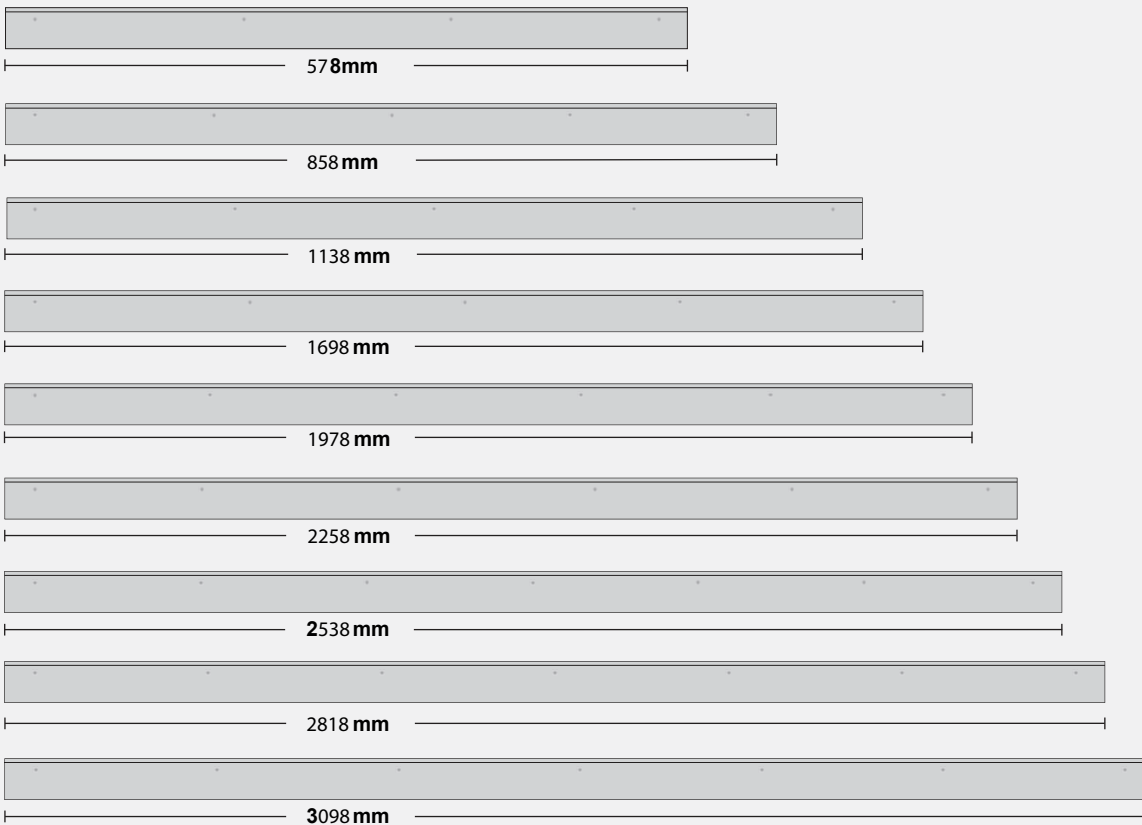

DESCRIPTION	LENGTHS										
total luminaire length in mm	578	858	1138	1418	1698	1978	2258	2538	2818	3098	3378
total luminaire length in inches	23	34	45	56	67	78	89	99	111	122	133
'560 board multiples	1.0	1.5	2.0	2.5	2.0	3.5	4.0	4.5	4.5	5.5	6.0

EXAMPLE OF STANDARD LENGTH COMBINATION

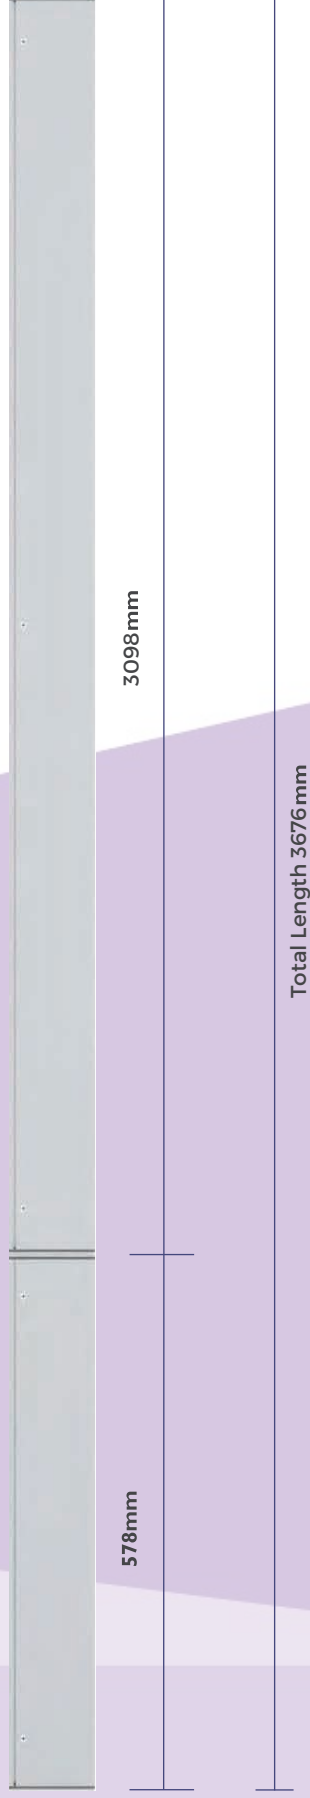

CREATING LENGTHS WITH XTI | 4.0 Square IP66 IK11

The XTI | 4.0 IP66 IK11 set lengths can be coupled together in any combination to achieve the desired length.

Note: custom lengths are also available – please consult your local Xero office for information

The XTI | 4.0 IP66 IK11 set lengths can be coupled together in any combination to achieve the desired length.


CUSTOM LENGTHS

Custom lengths are available in 0.984" (25mm) increments

XTI | 4.0 Square

Optical control

XTI profiles come with many diffuser options for glare control in any application



Clear
Polycarbonate



Opal
Polycarbonate



Vandal proof
option



Emergency
packs