

XERO
TECHNOLOGY
INFRASTRUCTURE **XTI**



XTI | 5.0 Inground Uplight

IK11 | IP67

Size

4.80" Wide x 3.54" High

Dimensions include inground niche.

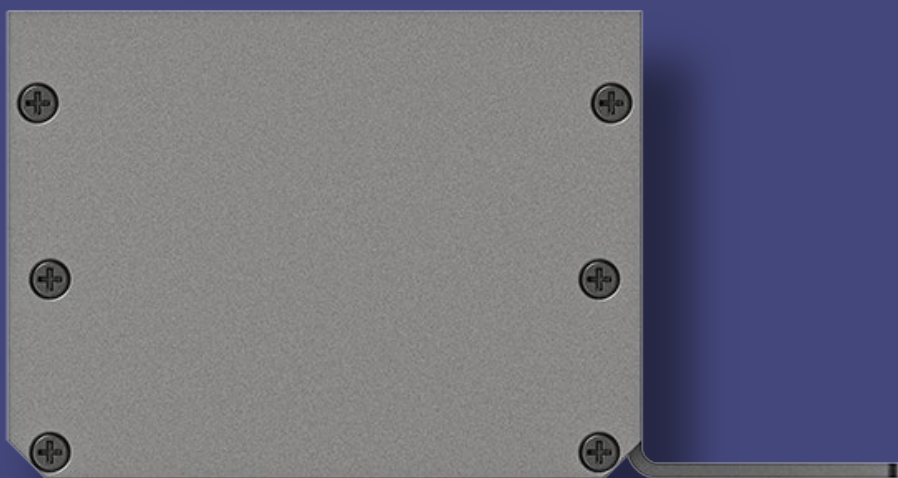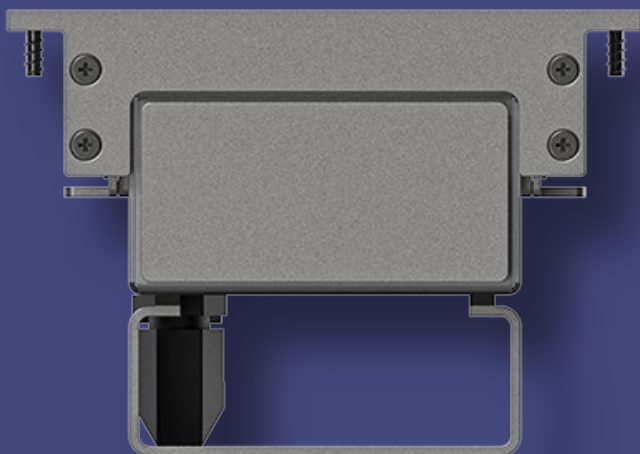

DATA TABLE

Output	Proformax 24	CRI	80+
		Lumen Maintenance	80,000 Hours (L80 B20 @ 95°F)
	Proformax S	CRI	90+
		Lumen Maintenance	82,000 Hours (L80 B10 @ 95°F)
Warranty	Proformax 24		5 years
	Proformax S		7 years
Electrical	Voltage input range		120 – 277V
	Control methods		DALI 2
	Approvals		UL / CE / CCC / AS:NZS / EMC
Physical	Dimensions		Luminaire 4.80" Wide x 2.16" High (including niche Height is 3.54")
	Weight		5.01 lbs average weight per foot
	Housing		Stainless steel
	Diffuser		Laminated & Toughened Glass with white interlayer Optional colour interlayer available
	Connections		Optional IP Rated polarised electrical connection between sections
	Distribution		Symmetric distribution
	Mounting		Inground niche for concrete or paving installation
	Joiner options		Straight joiners or butt corners
	Operating temperatures		Proformax S – (-13°F to 95°F) Proformax 24 – (-13°F to 140°F)
	Environment		IP67
	IK rating		IK10
	Minimum length adjustment		5.51"
	LED Board types		Proformax24 (24 V system) 5.51" / 11.02" / 22.05" lengths. Zhaga compatible Proformax S in 5.51" / 11.02" / 22.05" lengths. Zhaga compatible
	Vandal-proof		Available with anti-vandal fasteners
	Optional Extras		Thermal throttle, environmental plug, polarised / IP rated plug and socket Environmental anti-graffiti coating

XERO
TECHNOLOGY
INFRASTRUCTURE **XTI** **I**

XTI | 5.0 Inground Uplight
IP67 | IK11



XTI | 5.0 Inground Uplight IP67 / IK11 maximum and minimum length



Please note: Multiple luminaires can be joined together to achieve any continuous length

XERO
TECHNOLOGY
INFRASTRUCTURE



XTI | 5.0 Inground Uplight
IP67 | IK10+

Optical Control


XTI profiles come with many diffuser options for glare control in any application




Clear Polycarbonate




Plexi Glass
Polycarbonate



Coloured
Interlayer



Vandal Proof



Emergency Packs