


INSTALLATION INSTRUCTION

- 1 Beam or support
- 2 Fastener
- 3 Ceiling
- 4 Rollerball barrel
- 5 Suspension Wire
- 6 Clutch
- 7 Curved Endplate
- 8 Diffuser

Installer must ensure that the slot orientation in ceiling barrel allows suspension wire to remain perpendicular at all times in all orientations

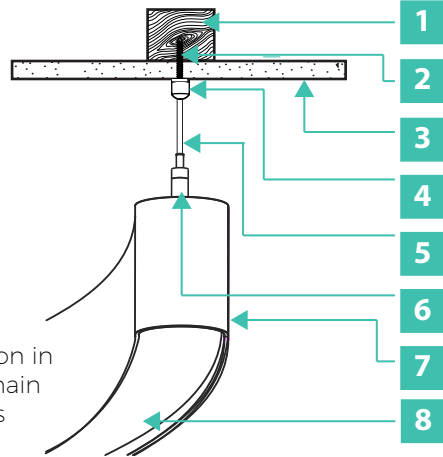

1

Clutch & screw Ceiling Barrel

Wire Allen Key

Suspension Plan

Determine mounting location

3

Can be mounted on flat ceiling, raked ceiling & wall

4

Ceiling Barrel Screw (Not supplied)

Screw Rollerball to mounting service

5

Insert wire into barrel

6

Remove diffuser

Note: Position of diffuser relative to body section

7

Remove geartray

Note: Only remove the plain steel fasteners. DO NOT remove the black fasteners

8

Position clutch over predrilled hole in profile and fasten with screw supplied

9

Replace geartray, then reassemble diffuser

WARNING
Take care to replace diffuser and geartray to original location

10

Adjust wire height with clutch

11

Trim off excess wire once level

12

← 3m max →

Ensure a maximum of 3m between wires is maintained

NOTE: Wires should be no more than 0.5m from the end of the luminaire & no more than 0.5 from a join

13

If more than one piece do up the latch

14

NOTE: If latch does not bring sections together adjust latch hook by turning hook

If more information is required please contact you local representative by going to xerolighting.com/contacts or email us at headoffice@xerolighting.com