



XERO  
TECHNOLOGY  
INFRASTRUCTURE

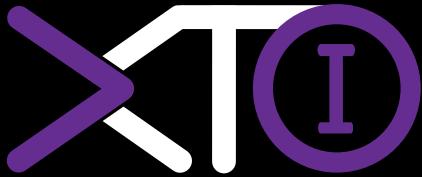

# XTI | 1.5 Square


## | K11 | IP66

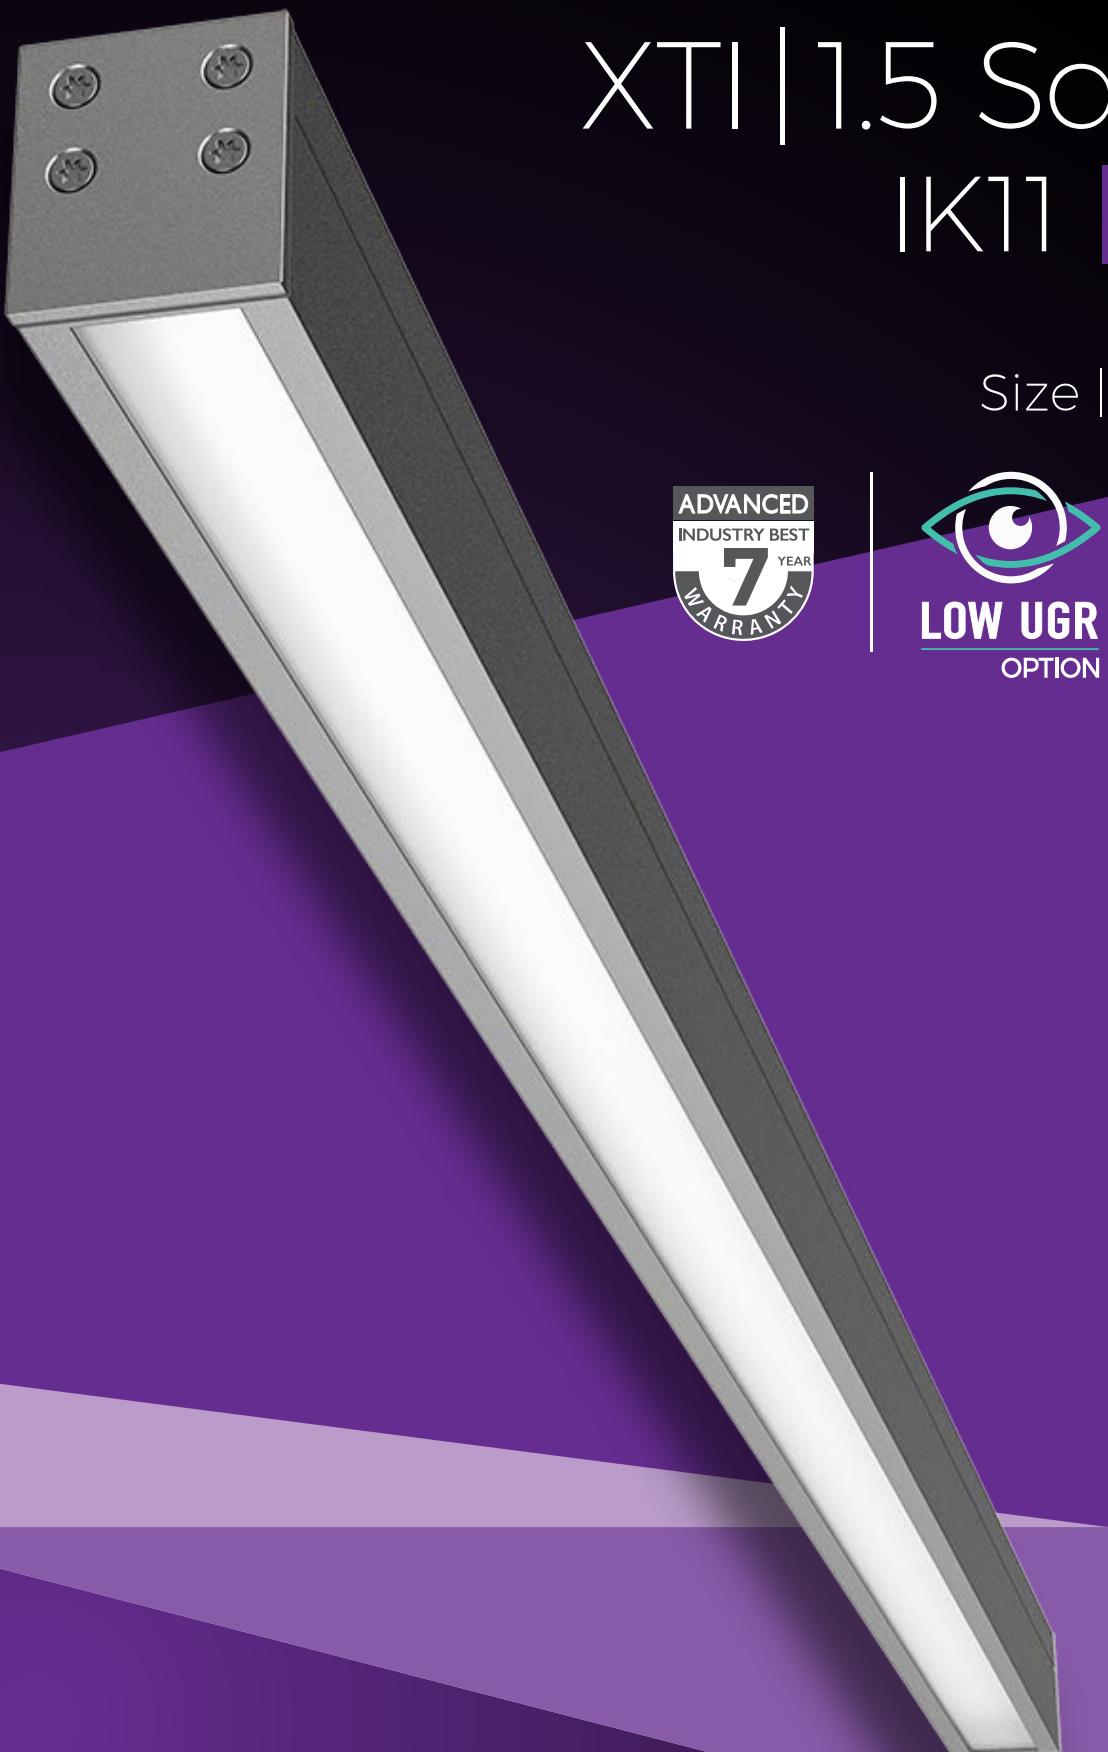

XERO  
TECHNOLOGY  
INFRASTRUCTURE



XTI|1.5 Square  
IP66 | IK11

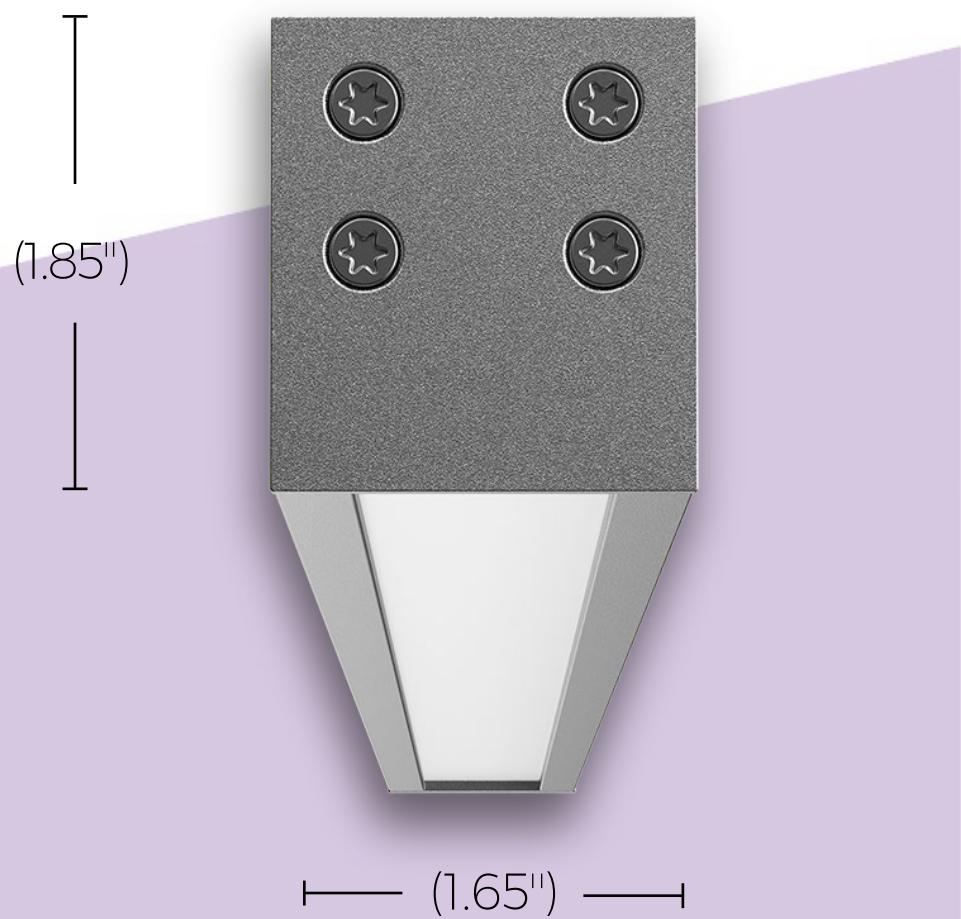


# XTI | 1.5 Square

## DATA TABLE


<b>Output</b>	Xeramix	CRI	80+
		Lumen Maintenance	114,000 Hours ( L90 B10 @ 122°F )
	Proformax S	CRI	90+
		Lumen Maintenance	82,000 Hours ( L80 B10 @ 95°F )
<b>Warranty</b>	Xeramix		Xeramix 1 = 10 years
	Proformax S		Proformax S = 7 years
<b>Electrical</b>	Voltage input range		120 – 277V
	Control methods		Dimming options for white light: 0-10V
	Total harmonic distortion THD		<10% max
	Approvals		UL / CE / CCC / AS:NZS / EMC
<b>Physical</b>	Dimensions		1.65" Wide x 1.85" High
	Weight		2.25 lbs average weight per foot
	Housing		Aluminium extrusion with powder-coated finish: Standard powder-coated colours are: White / black and silver. Custom powder-coat on request
	Diffuser		Opaque Polycarbonate Diffuser
	Connections		Optional IP Rated polarised electrical connection between sections
	Compatible ceiling type		Suitable for drywall ceilings, metal pan, concrete, timber and T bar grid ceilings
	Mounting		Field adjustable rollerball wire suspensions / rod suspensions / wall mounting / surface mount / custom mounting
	Joiner options		(Non lit) 90° Butt bend / Tee Butt bend
	Operating temperatures		Proformax S – (-13°F to 95°F)   Xeramix – (-13°F to 140°F)
	Environment		Luminaire IP66 (Not in direct sunlight, diffuser must not face upwards).
	Minimum length adjustment		5.51"
	LED Board types		Xeramix in 0.98" / 3.94" / 11.02" / 22.05" lengths. Zhaga compatible Proformax S in 5.51" / 11.02" / 22.05" lengths. Zhaga compatible
	Vandal-proof		Available with anti-vandal fasteners
	Optional Extras		Lanyards / Emergency packs

# XTI | 1.5 Square IP66 | IK11

## XTI AVAILABLE LENGTHS



## EXAMPLE OF A STANDARD LENGTH COMBINATION

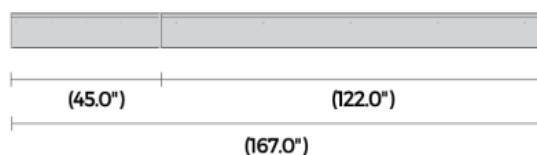

## CREATING LENGTHS WITH THE XTI SERIES

The XTI range IP66 | IK11 set lengths can be coupled together in any combination to achieve the desired length.  
Note: Custom lengths are also available - Please consult your local office for information

## CREATING LENGTHS WITH XTI | 1.5 Series IP66 IKII

The XTI | 1.5 IP66 IK11 set lengths can be coupled together in any combination to achieve the desired length.  
Note: custom lengths are also available – please consult your local Xero office for information

The XTI | 1.5 IP66 IK11 set lengths can be coupled together in any combination to achieve the desired length.

## CUSTOM LENGTHS

Custom lengths are available in 0.98" increments

XTI | 1.5 Square  
IP66 | IK11

## Optical control

diffuser option



Opaque  
Polycarbonate



Vandal proof  
option



Emergency  
packs