

XERO  
TECHNOLOGY  
INFRASTRUCTURE




# XTI | 4.0 Square IK11 | IP66

Size | 4.33" x 4.33"



XTI | 4.0 Square

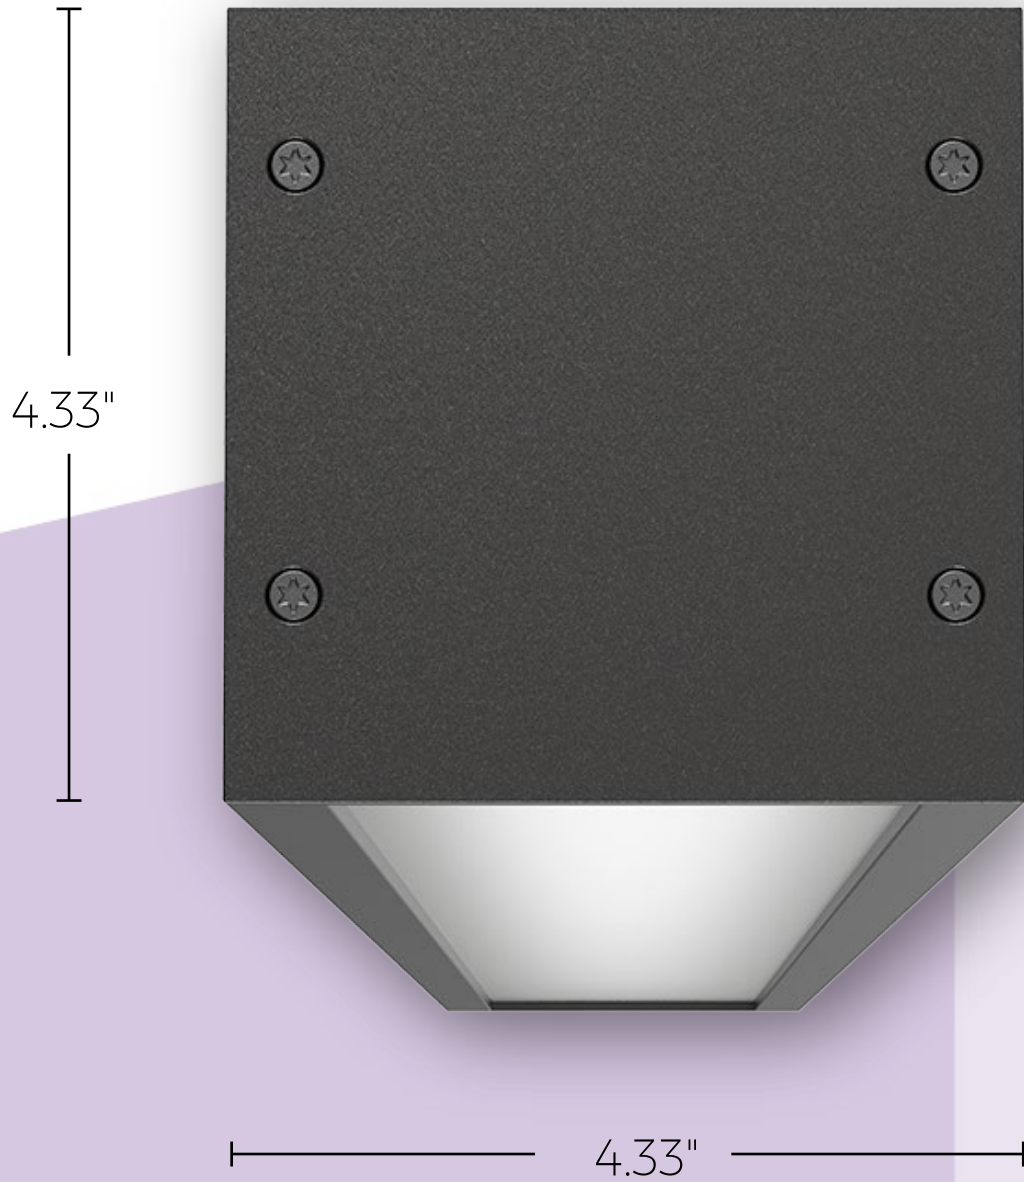


# XTI | 4.0 Square

## DATA TABLE


<b>Output</b>	Xeramix	CRI	80+
		Lumen Maintenance	114,000 Hours ( L90 B10 @ 122°F )   1M hours (L70 B10 @ 122°F)
	Proformax S	CRI	90+
		Lumen Maintenance	82,000 Hours ( L80 B10 @ 95°F )
<b>Warranty</b>	Xeramix	Xeramix I = 10 years   Xeramix R = 15 years	
	Proformax S	Proformax S = 7 years	
<b>Electrical</b>	Voltage input range		120 – 277V
	Control methods		Dimming options for white light: 0-10V
	Total harmonic distortion THD		<10% max
	Approvals		UL / CE / CCC / AS:NZS / EMC
<b>Physical</b>	Dimensions		4.33" High x 4.33" Wide
	Weight per feet		3.02 lbs average weight per foot
	Housing		Aluminium extrusion with powder-coated finish: Standard powder-coated colours are: White / black and silver. Custom powder-coat on request
	Diffuser		PlexiGlass
	Connections		Speed connect joining system with polarised electrical connection between sections
	Compatible ceiling type		Suitable for drywall ceilings, metal pan, concrete, timber and T bar grid ceilings
	Mounting		Surface Mounting / Custom Mounting / Rod Suspension / Wall Mounting
	Joiner options		90° / Straight / 180° / custom
	IK rating		IK11
	Operating temperatures		Proformax S – (-13°F to 95°F)   Xeramix – (-13°F to 140°F)
	Environment		Semi Outdoor IP66 (Not in direct sunlight)
	Minimum length adjustment		5.51"
	LED Board types		Xeramix in 0.98" / 3.94" / 11.02" / 22.05" lengths. Zhaga compatible Proformax S in 5.51" / 11.02" / 22.05" lengths. Zhaga compatible
	Vandal-proof		Available with anti-vandal fasteners
	Optional Extras		Lanyards / Emergency packs

# XTI | 4.0 Square

## XTI AVAILABLE LENGTHS



## EXAMPLE OF A STANDARD LENGTH COMBINATION

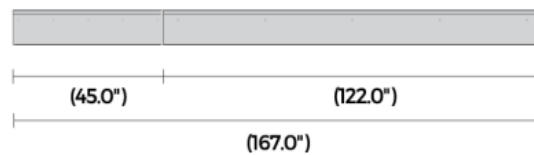

## CREATING LENGTHS WITH THE XTI SERIES

The XTI range IP66 | IK11 set lengths can be coupled together in any combination to achieve the desired length.  
Note: Custom lengths are also available - Please consult your local office for information

## CREATING LENGTHS WITH XTI | 4.0 Series IP66 IK11

The XTI | 4.0 IP66 IK11 set lengths can be coupled together in any combination to achieve the desired length.  
Note: custom lengths are also available - please consult your local Xero office for information

The XTI | 4.0 IP66 IK11 set lengths can be coupled together in any combination to achieve the desired length.


## CUSTOM LENGTHS

Custom lengths are available in 0.98" increments

## XTI | 4.0 Square

# Optical control

XTI profiles come with many diffuser options for glare control in any application



Clear  
Polycarbonate



Opal  
Polycarbonate



Vandal proof  
option



Emergency  
packs