



XTA | 2.0 Recessed

Size

0

0

0

0

2.36" Wide (2.87" Wide Inc flange) x 2.95"High









## DATA TABLE



Output	CRI	90+
Warranty	Proformax S	7 years
Electrical	Voltage input range	120 – 277V
	Control methods	Dimming options for white light: 0-10V
	Total harmonic distortion THD	<10%
	Approvals	UL/CE/CCC/AS:NZS/EMC
Physical	Dimensions	2.36" Wide (2.87" inc flange) x 2.95" High
	Weight	2 lbs average weight per foot
	Housing	Aluminium extrusion with powder-coated finish: Standard powder-coated colours are: White / black and silver. Custom powder-coat on request
	Diffuser	Frosted acrylic lens / Polycarbonate lens / Microprism lens / Louvres available in White, Black, or Silver  * Linear OPTIK series: includes 40° Beam, 60° Beam, 70° Beam, 90° Beam, 110° Wide Beam, 145° Extra Wide  Beam, 165° Extra Wide Beam, Asymmetric Beam, Double Asymmetric Beam  * NOTE: NOT AVAILABLE IN IP55
	Connections	Speed connect joining system with polarised electrical connection between sections
	Compatible ceiling type	Suitable for drywall ceilings, metal pan, concrete, timber and T bar grid ceilings
	Mounting	Drywall clips as standard
	Joiner options	Lit corner 90° / Cross 90° / Tee 90° / Straight 180° Join
	Operating temperatures	ProformaxS – (-13°F to 95°F)
	Environment	Dry indoor application only IP20
	Minimum length adjustment	5.51"
	LED Board types	ProformaxS boards in 5.51" / 11.02" / 22.05" lengths Zhaga compatible
	Optional Extras	Emergency packs










XTA | 2.0 Recessed indoor series IP20

Optical control
All XTA profiles come with many diffuser options for glare control in any application

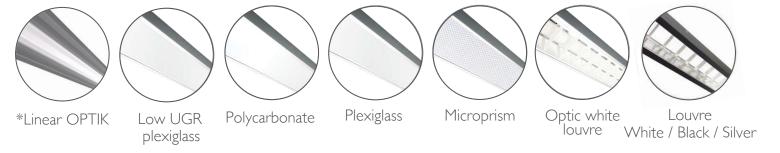



## Accessories and options

