



XERO
TECHNOLOGY
INFRASTRUCTURE



XTI | 2.0 Square IKII | IP66

Size

2.75" Wide x 2.36" High




DATA TABLE


Output	Xeramix	CRI	80+
		Lumen Maintenance	114,000 Hours (L90 B10 @ 122°F)
	Proformax S	CRI	90+
		Lumen Maintenance	82,000 Hours (L80 B10 @ 95°F)
Warranty	Xeramix	Xeramix 1 = 10 years	
	Proformax S	Proformax S = 7 years	
Electrical	Voltage input range	120 – 277V	
	Control methods	Dimming options for white light: 0-10V	
	Approvals	UL / CE / CCC / AS:NZS / EMC	
Physical	Dimensions	2.36" Wide x 2.75" High	
	Weight	2.42 lbs average weight per foot	
	Housing	Aluminium extrusion with powder-coated finish: Standard powder-coated colours are: White / black and silver. Custom powder-coat on request	
	Diffuser	Opaque Polycarbonate Diffuser / Clear Polycarbonate Diffuser / Louvres available in White, Black, or Silver	
	Connections	Optional IP Rated polarised electrical connection between sections	
	Compatible ceiling type	Suitable for drywall ceilings, metal pan, concrete, timber and T bar grid ceilings	
	Mounting	Field adjustable rollerball wire suspensions / rod suspensions / wall mounting / surface mount / custom mounting	
	Joiner options	(Non lit) 90° Butt bend / Tee Butt bend	
	Operating temperatures	Proformax S – (-13°F to 95°F) Xeramix – (-13°F to 140°F)	
	Environment	Luminaire IP66 (Not in direct sunlight, diffuser must not face upwards).	
	IK rating	IK11	
	Minimum length adjustment	5.51"	
	LED Board types	Xeramix in 0.98" / 3.94" / 11.02" / 22.05" lengths. Zhaga compatible Proformax S in 5.51" / 11.02" / 22.05" lengths. Zhaga compatible	
	Vandal-proof	Available with anti-vandal fasteners	
	Optional Extras	Lanyards / Emergency packs	

XTI | 2.0 Square IP66 | IK11

XTI AVAILABLE LENGTHS



EXAMPLE OF A STANDARD LENGTH COMBINATION

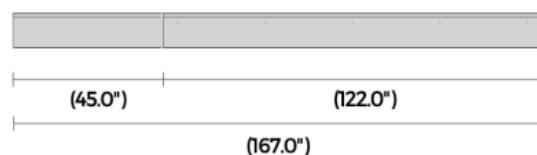

CREATING LENGTHS WITH THE XTI SERIES

The XTI range IP66 | IK11 set lengths can be coupled together in any combination to achieve the desired length.
Note: Custom lengths are also available - Please consult your local office for information

CREATING LENGTHS WITH XTI | 2.0 Series IP66 IKII


The XTI | 1.5 IP66 IK11 set lengths can be coupled together in any combination to achieve the desired length.
Note: custom lengths are also available – please consult your local Xero office for information

The XTI | 1.5 IP66 IK11 set lengths can be coupled together in any combination to achieve the desired length.

CUSTOM LENGTHS

Custom lengths are available in 0.98" increments

JOINING CONFIGURATION

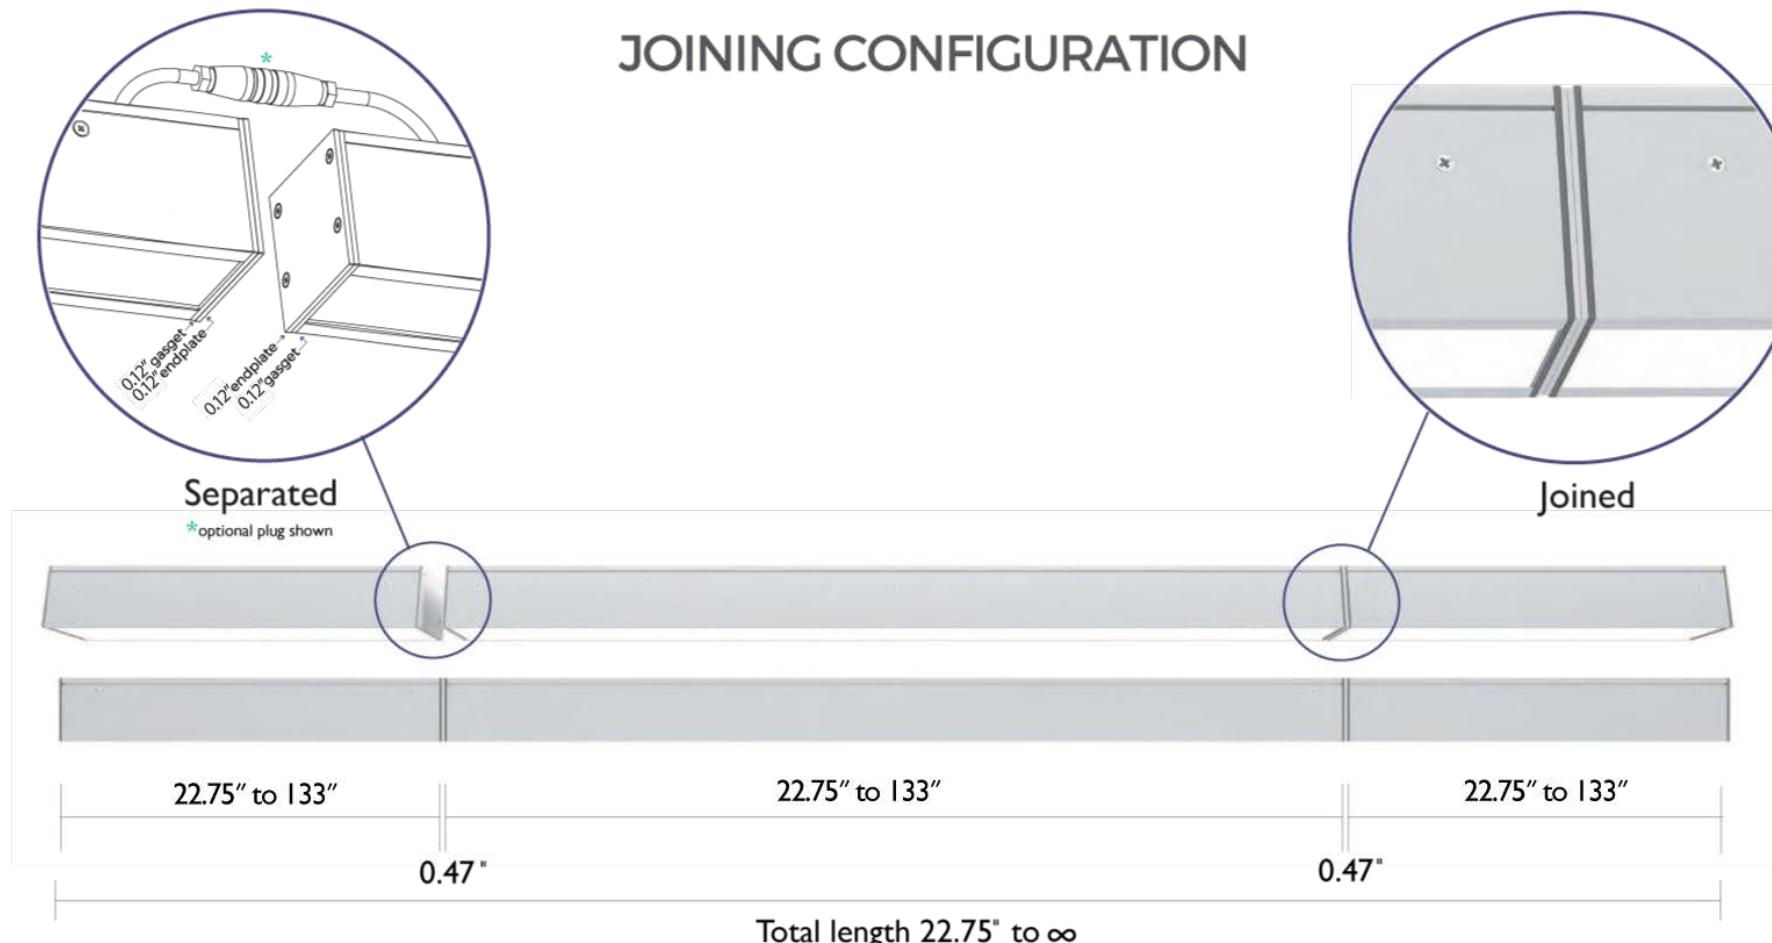


XERO
TECHNOLOGY
INFRASTRUCTURE



XTI | 2.0 Square
IP66 | IK11

Optical control

XTI profiles come with many diffuser options for glare control in any application




Clear
Polycarbonate



Opal
Polycarbonate




Silver Louvre




White Louvre



Black Louvre




Vandal Proof




Emergency Packs


MOUNTING

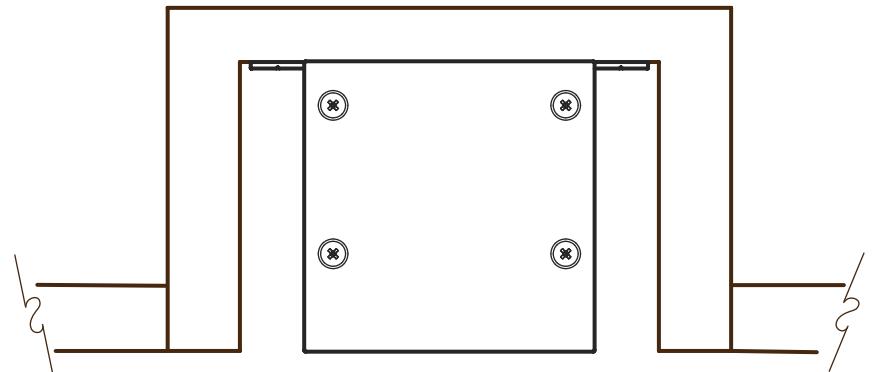


Recessed Mounting
(ceiling trof by others)

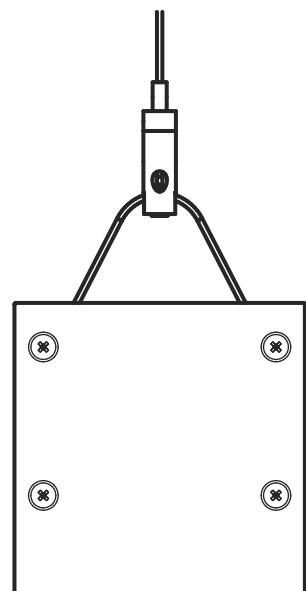


Wire Suspension

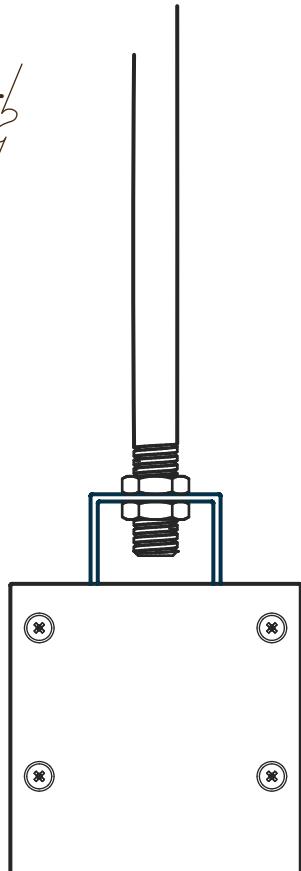

Rod Suspension

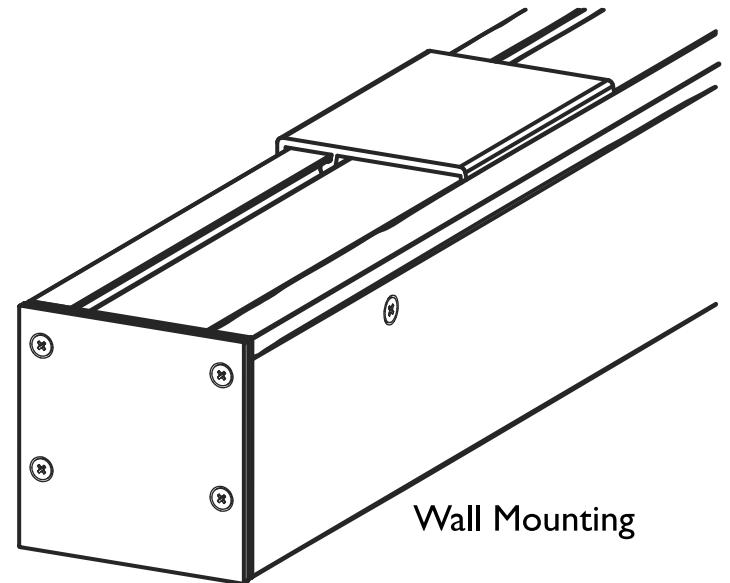

Wall Mounting

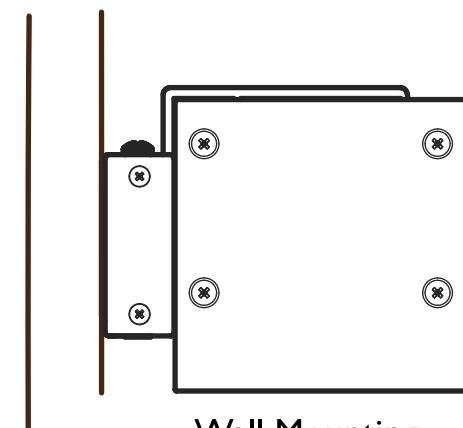

**Wall Mounting
Side View**