



XTA | 2.5 Loop Beam

ip55



AVAILABLE
WITH
OPTIONAL

MULTI-BEAM
OPTIK 
optical control downlights



Data Table

Output	CRI	90+
Warranty	Proformax S	7 years
Electrical	Voltage input range	120 – 277V
	Control methods	Dimming options for white light: 0-10V
	Total harmonic distortion THD	<10% max
	Approvals	UL / CE / CCC / AS:NZS / EMC
Physical	Dimensions	2.79" Wide x 5.11" High
	Weight	3.13 Lbs weight per foot
	Housing	Aluminium extrusion with powder-coated finish: Standard powder-coated colours are: White / black and silver. Custom powder-coat on request
	Upward Diffuser	Frosted acrylic lens
	Downward Diffuser	Frosted acrylic lens / Polycarbonate lens / Multi-Beam OPTIK Downlight available in 10° / 18° Spot Beams, 30° Medium Beam, 40° / 50° / 60° Wide Beams
	Accessories	Emergency packs
	Connections	Polarised electrical connection between sections sections
	Compatible ceiling type	Suitable for (drywall) ceilings, metal pan, concrete, timber and T-bar grid ceilings
	Mounting	Field adjustable rollerball wire suspensions / rod suspensions
	Bend Radii	16.92"R / 32.07"R / 48.42"R as standard with custom radii available
	Endplate Options	Conseal flat endplates with gasket section joins
	Operating temperatures	ProformaxS – (-13°F to 95°F)
	Environment	(Direct) IP55 (Indirect) IP50 (Not in direct sunlight for both direct and indirect)
	Minimum length adjustment	5.51"
	LED Board types	ProformaxS boards in 5.51" / 11.02" / 22.05" lengths Zhaga compatible

XTA | 2.5 LOOP Beam

indoor series IP55

Optical control

All XTA profiles come with many diffuser options for glare control in any application

Up optics




Plexiglass

Down optics



*Multi-Beam
Downlight



Polycarbonate
(Straights only)



Plexiglass

MULTI-BEAM
OPTIK □□□□
optical control downlights

*Beam Angles

Wide
Beam 60°

Wide
Beam 50°


Wide
Beam 40°

Medium
Beam 30°


Spot 18°

Spot 10°

Accessories and Options



Loop Templates




XM3 Canopy
Kit



sensors / daylight
harvesting



emergency packs




downlights

XTA | 2.5 Loop Beam IP55



XTA | 2.5 Loop Beam IP55

Standard Bend Options

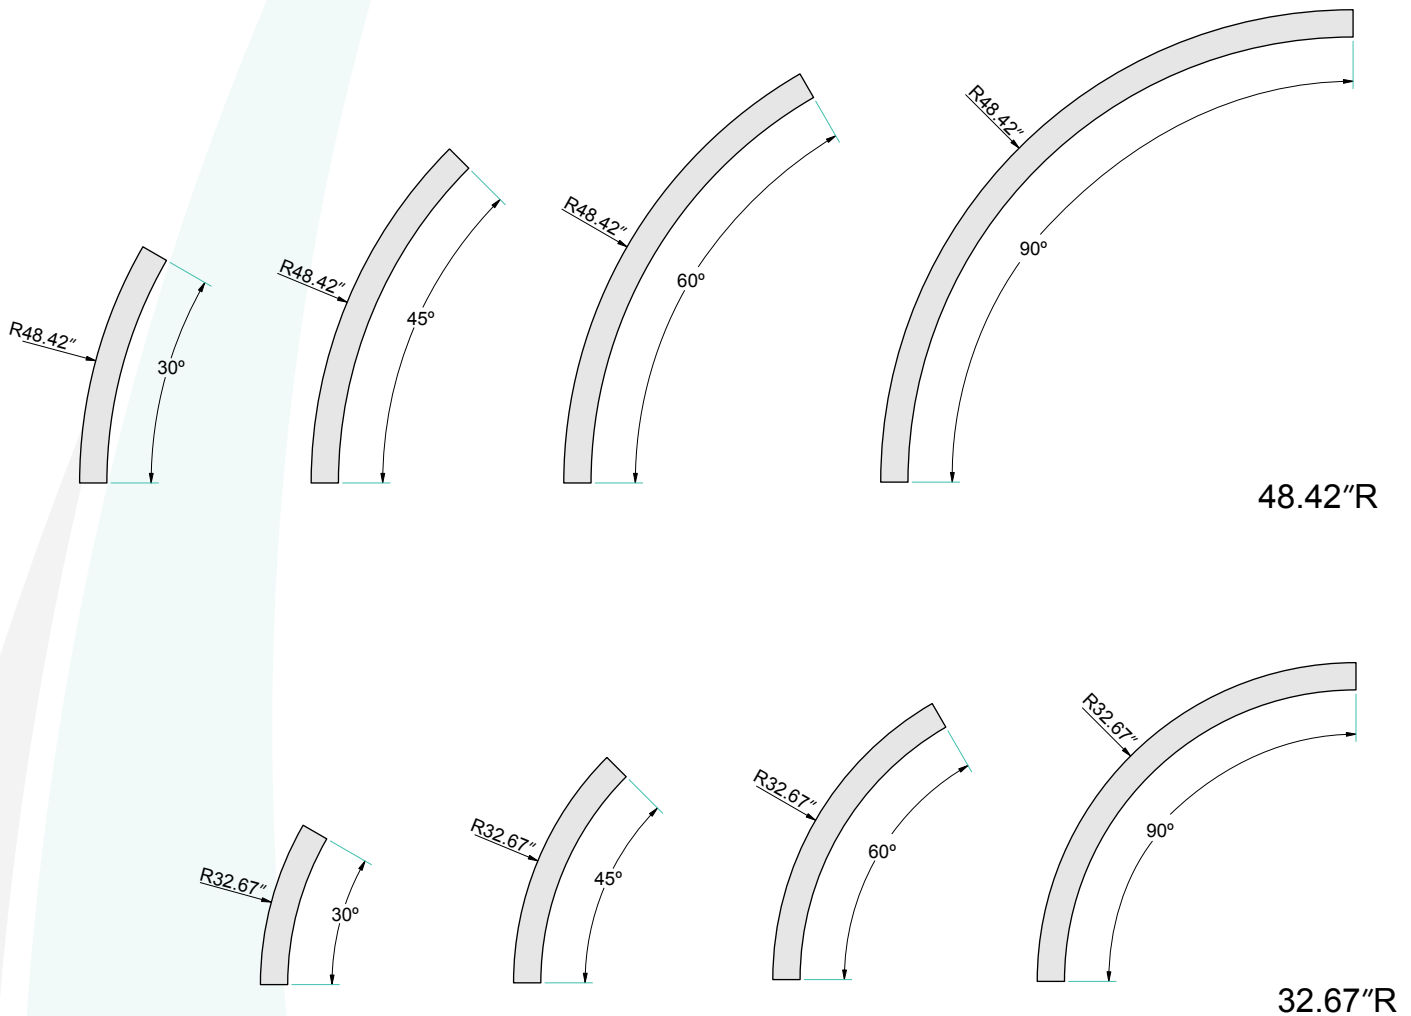


*Other custom radii available on request



All radii bends can have integral drivers provided they adjoin a straight section or are $\geq 48.42''R$

XTA | 2.5 Loop Beam IP55

Standard Arc Options

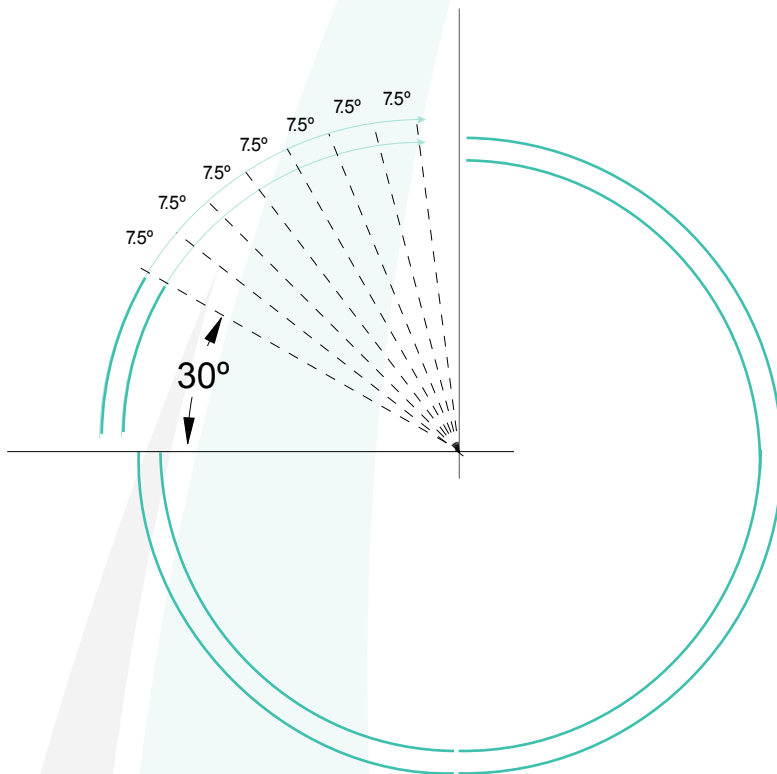

Minimum 30° segment
then each segment can be
increased in 7.5° increments
Arc segments below
48.42"R have remote drivers

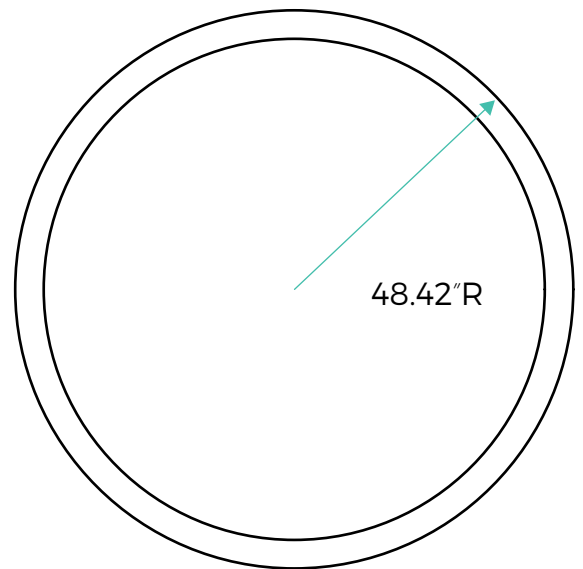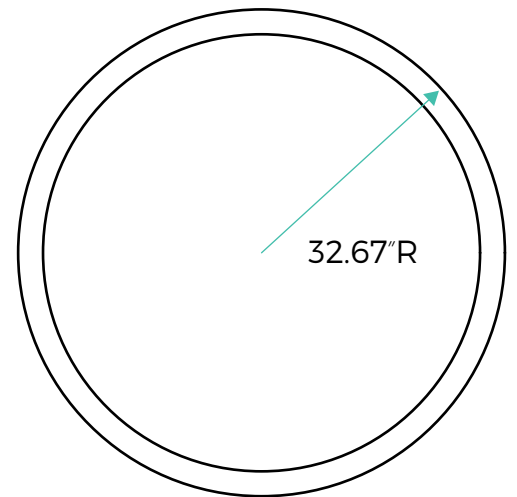


Other options available on request

XTA | 2.5 Loop Beam IP55

Some examples of Shapes and Sizes

The LOOP series has the ability to form myriad of shapes and sizes from simple curved corners to the most complex configuration only limited by your imagination.

Note: Joins for IP55 versions are unlit

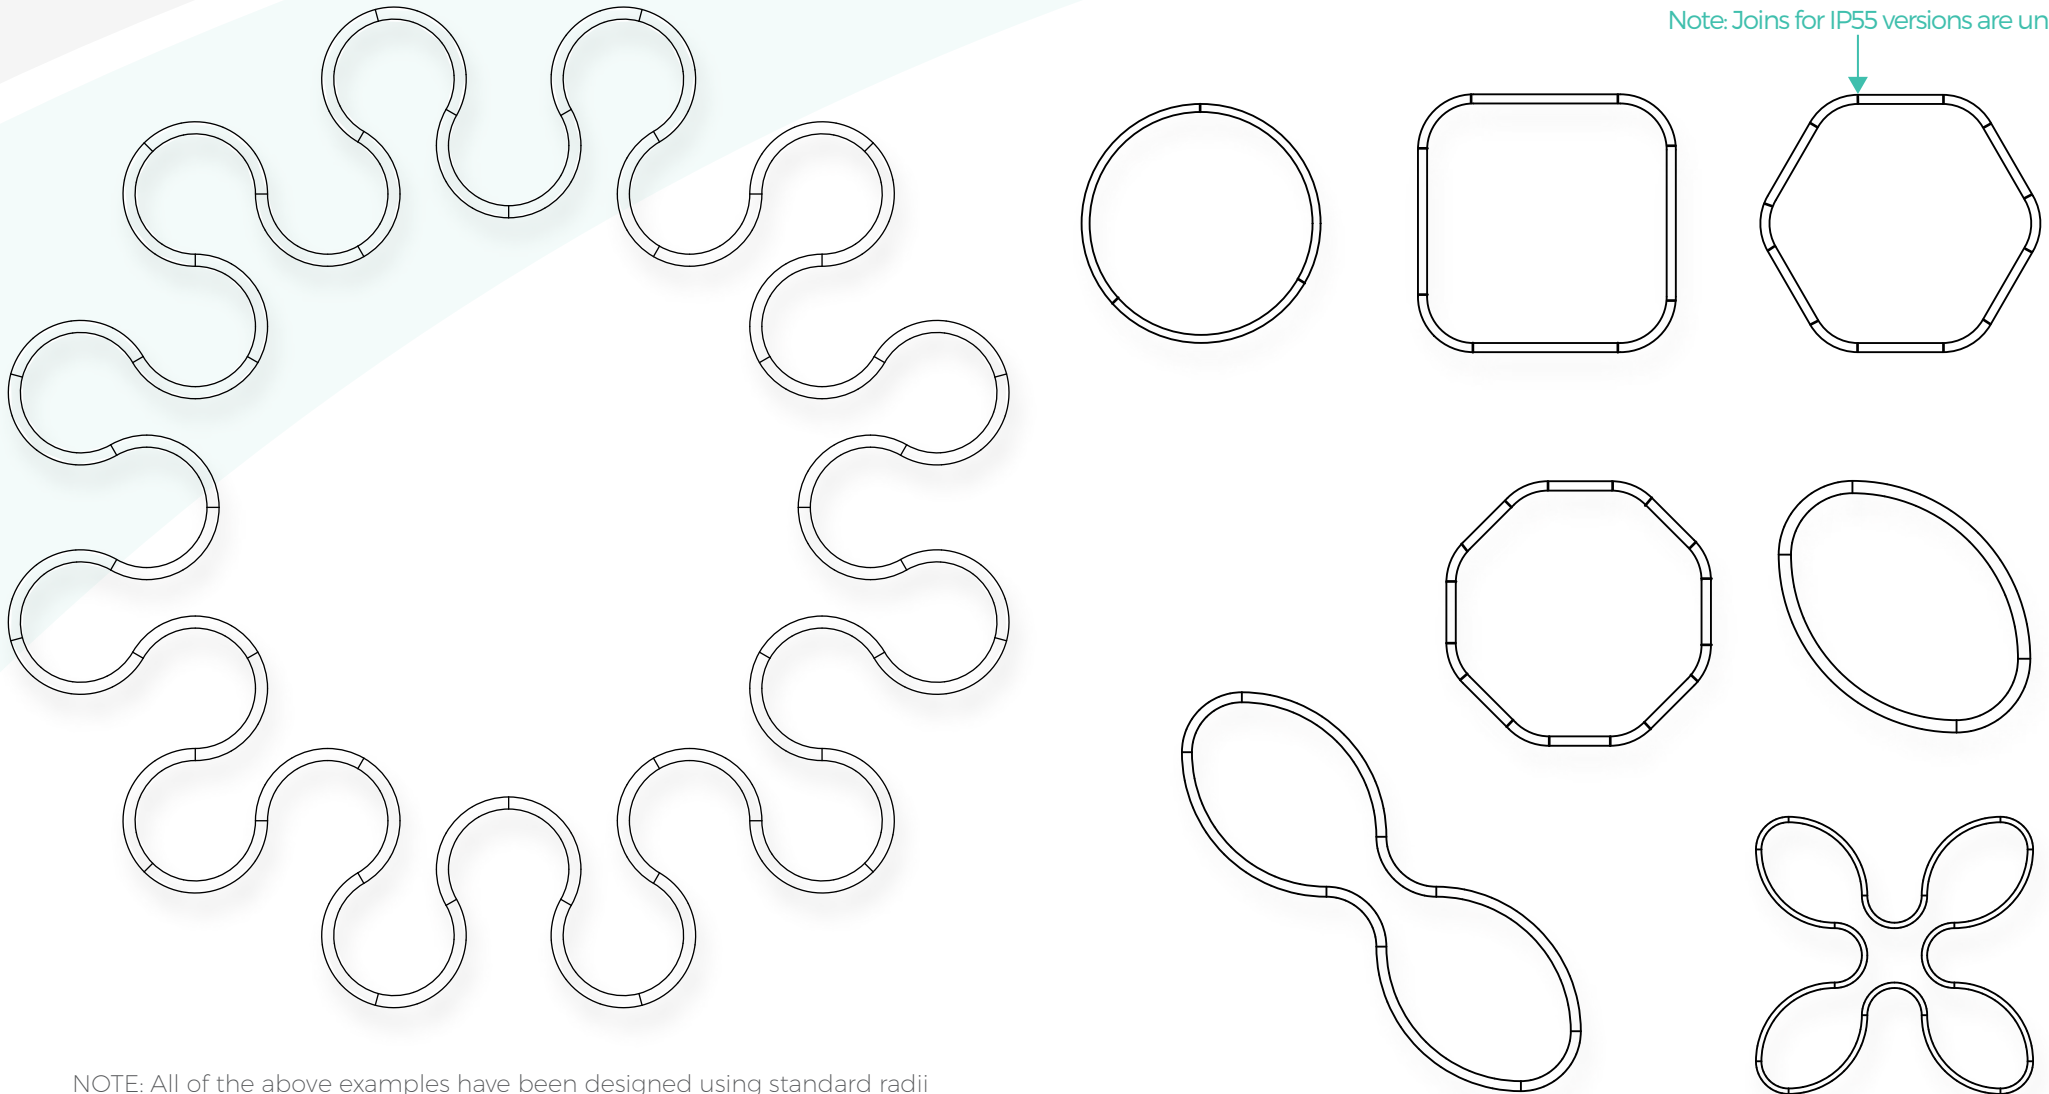

NOTE: All of the above examples have been designed using standard radii