

XERO
TECHNOLOGY
INFRASTRUCTURE



XTI|1.5 Square


IK11 | IP66

This profile has the option of
non-continuous light with internal gear (or)
continuous light with remote gear

Size | 1.65" x 1.85"



XTI|1.5 Square
IP66 | IK11

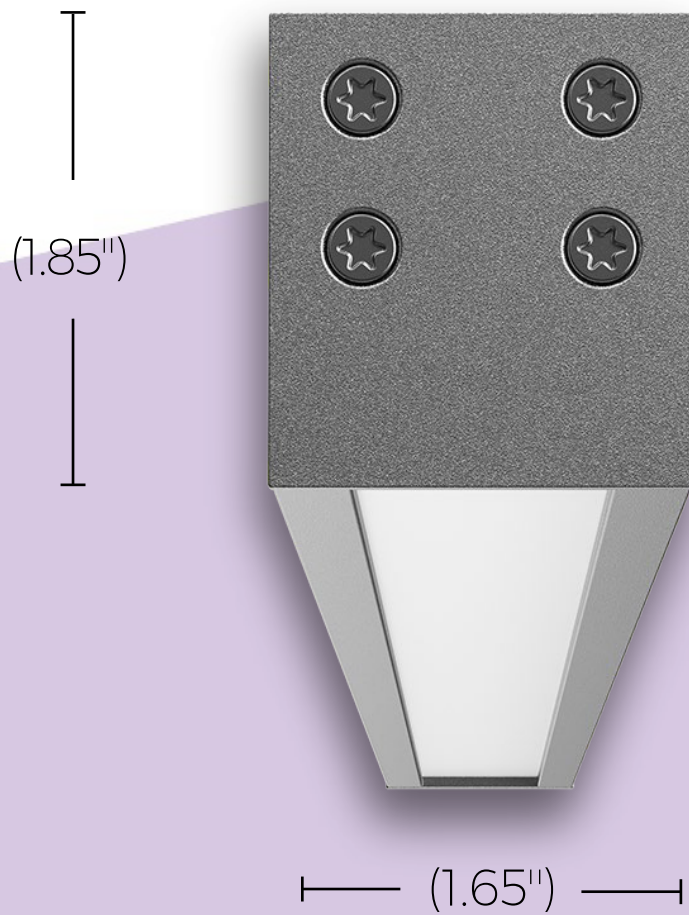

XTI | 1.5 Square


This profile has the option of
non-continuous light with internal gear (or)
continuous light with remote gear

DATA TABLE


Output	Xeramix	CRI	80+
		Lumen Maintenance	114,000 Hours (L90 B10 @ 122°F)
	Proformax S	CRI	90+
		Lumen Maintenance	82,000 Hours (L80 B10 @ 95°F)
	24V RGBW System		Single Row (DALI / DMX Dimming)
Warranty	Xeramix		10 years
	Proformax S		7 years
	24V RGBW		3 years
Electrical	Voltage input range		120 – 277V
	Control methods		Dimming options for white light: 0-10V, Dimming options for RGBW: DALI, DMX
	Total harmonic distortion THD		<10% max
	Approvals		UL / CE / CCC / AS:NZS / EMC
Physical	Dimensions		1.65" Wide x 1.85" High
	Weight		2.25 lbs average weight per foot
	Housing		Aluminium extrusion with powder-coated finish: Standard powder-coated colours are: White / black and silver. Custom powder-coat on request
	Diffuser		Opaque Polycarbonate Diffuser
	Connections		Optional IP Rated polarised electrical connection between sections
	Compatible ceiling type		Suitable for drywall ceilings, metal pan, concrete, timber and T bar grid ceilings
	Mounting		Field adjustable rollerball wire suspensions / rod suspensions / wall mounting / surface mount / custom mounting
	Joiner options		(Non lit) 90° Butt bend / Tee Butt bend
	Operating temperatures		Proformax S – (-13°F to 95°F) Xeramix – (-13°F to 140°F) 24V RGBW – (4°F to 95°F)
	Environment		Luminaire IP66 (Not in direct sunlight, diffuser must not face upwards).
	Minimum length adjustment		5.51"
	LED Board types		Xeramix in 0.98" / 3.94" / 11.02" / 22.05" lengths. Zhaga compatible Proformax S in 5.51" / 11.02" / 22.05" lengths. Zhaga compatible
	Vandal-proof		Available with anti-vandal fasteners
	Optional Extras		Lanyards / Emergency packs

XTI | 1.5 Square IP66 | IK11

XTI AVAILABLE LENGTHS



EXAMPLE OF A STANDARD LENGTH COMBINATION

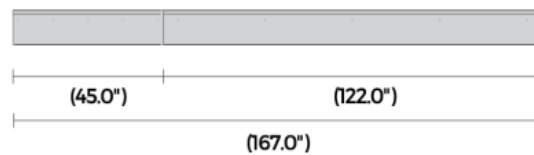

CREATING LENGTHS WITH THE XTI SERIES

The XTI range IP66 | IK11 set lengths can be coupled together in any combination to achieve the desired length.
Note: Custom lengths are also available - Please consult your local office for information

CREATING LENGTHS WITH XTI | 1.5 Series IP66 IK11

The XTI | 1.5 IP66 IK11 set lengths can be coupled together in any combination to achieve the desired length.
Note: custom lengths are also available – please consult your local Xero office for information

The XTI | 1.5 IP66 IK11 set lengths can be coupled together in any combination to achieve the desired length.

CUSTOM LENGTHS

Custom lengths are available in 0.98" increments

XERO
TECHNOLOGY
INFRASTRUCTURE



XTI | 1.5 Square
IP66 | IK11

Optical control

diffuser option



Opaque
Polycarbonate



Vandal proof
option



Emergency
packs