



XERO
TECHNOLOGY
INFRASTRUCTURE



XTI | 2.0 Slot IK II | IP66

Size

2.36" Wide x 3.93" High




DATA TABLE


Output	Xeramix	CRI	80+
		Lumen Maintenance	114,000 Hours (L90 B10 @ 122°F) 1M hours (L70 B10 @ 122°F)
	Proformax S	CRI	90+
		Lumen Maintenance	82,000 Hours (L80 B10 @ 95°F)
	24V RGBW System		Dual Row (DALI / DMX Dimming)
Warranty	Xeramix		Xeramix 1 = 10 years Xeramix R = 15 years
	Proformax S		7 years
	24V RGBW		3 years
Electrical	Voltage input range		120 – 277V
	Control methods		Dimming options for white light: 0-10V, Dimming options for RGBW: DALI, DMX
	Approvals		UL / CE / CCC / AS/NZS / EMC
Physical	Dimensions		2.36" Wide x 3.93" High
	Weight		2.55 lbs average weight per foot
	Housing		Aluminium extrusion with powder-coated finish: Standard powder-coated colours are: White / black and silver. Custom powder-coat on request
	Diffuser		Opaque Polycarbonate Diffuser / Clear Polycarbonate Diffuser / Louvers available in White, Black, or Silver
	Connections		Optional IP Rated polarised electrical connection between sections
	Compatible ceiling type		Suitable for drywall ceilings, metal pan, concrete, timber and T bar grid ceilings
	Mounting		Field adjustable rollerball wire suspensions / rod suspensions / wall mounting / surface mount / custom mounting
	Joiner options		(Non lit) 90° Butt bend / Tee Butt bend
	Operating temperatures		Proformax S – (-13°F to 95°F) Xeramix – (-13°F to 140°F), 24V RGBW – (4°F to 95°F)
	Environment		Luminaire IP66 (Not in direct sunlight, diffuser must not face upwards).
	IK rating		IK11
	Minimum length adjustment		5.51"
	LED Board types		Xeramix in 0.98" / 3.94" / 11.02" / 22.05" lengths. Zhaga compatible Proformax S in 5.51" / 11.02" / 22.05" lengths. Zhaga compatible
	Vandal-proof		Available with anti-vandal fasteners
	Optional Extras		Lanyards / Emergency packs

XTI | 2.0 Slot IP66 | IK11

XTI AVAILABLE LENGTHS



EXAMPLE OF A STANDARD LENGTH COMBINATION

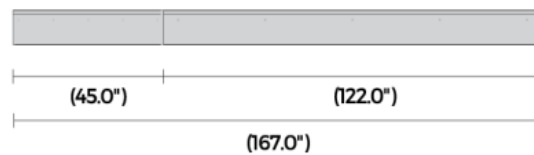

CREATING LENGTHS WITH THE XTI SERIES

The XTI range IP66 | IK11 set lengths can be coupled together in any combination to achieve the desired length.
Note: Custom lengths are also available - Please consult your local office for information

CREATING LENGTHS WITH XTI | 2.0 Series IP66 IK11


The XTI | 1.5 IP66 IK11 set lengths can be coupled together in any combination to achieve the desired length.
Note: custom lengths are also available – please consult your local Xero office for information

The XTI | 1.5 IP66 IK11 set lengths can be coupled together in any combination to achieve the desired length.

CUSTOM LENGTHS

Custom lengths are available in 0.98" increments

JOINING CONFIGURATION

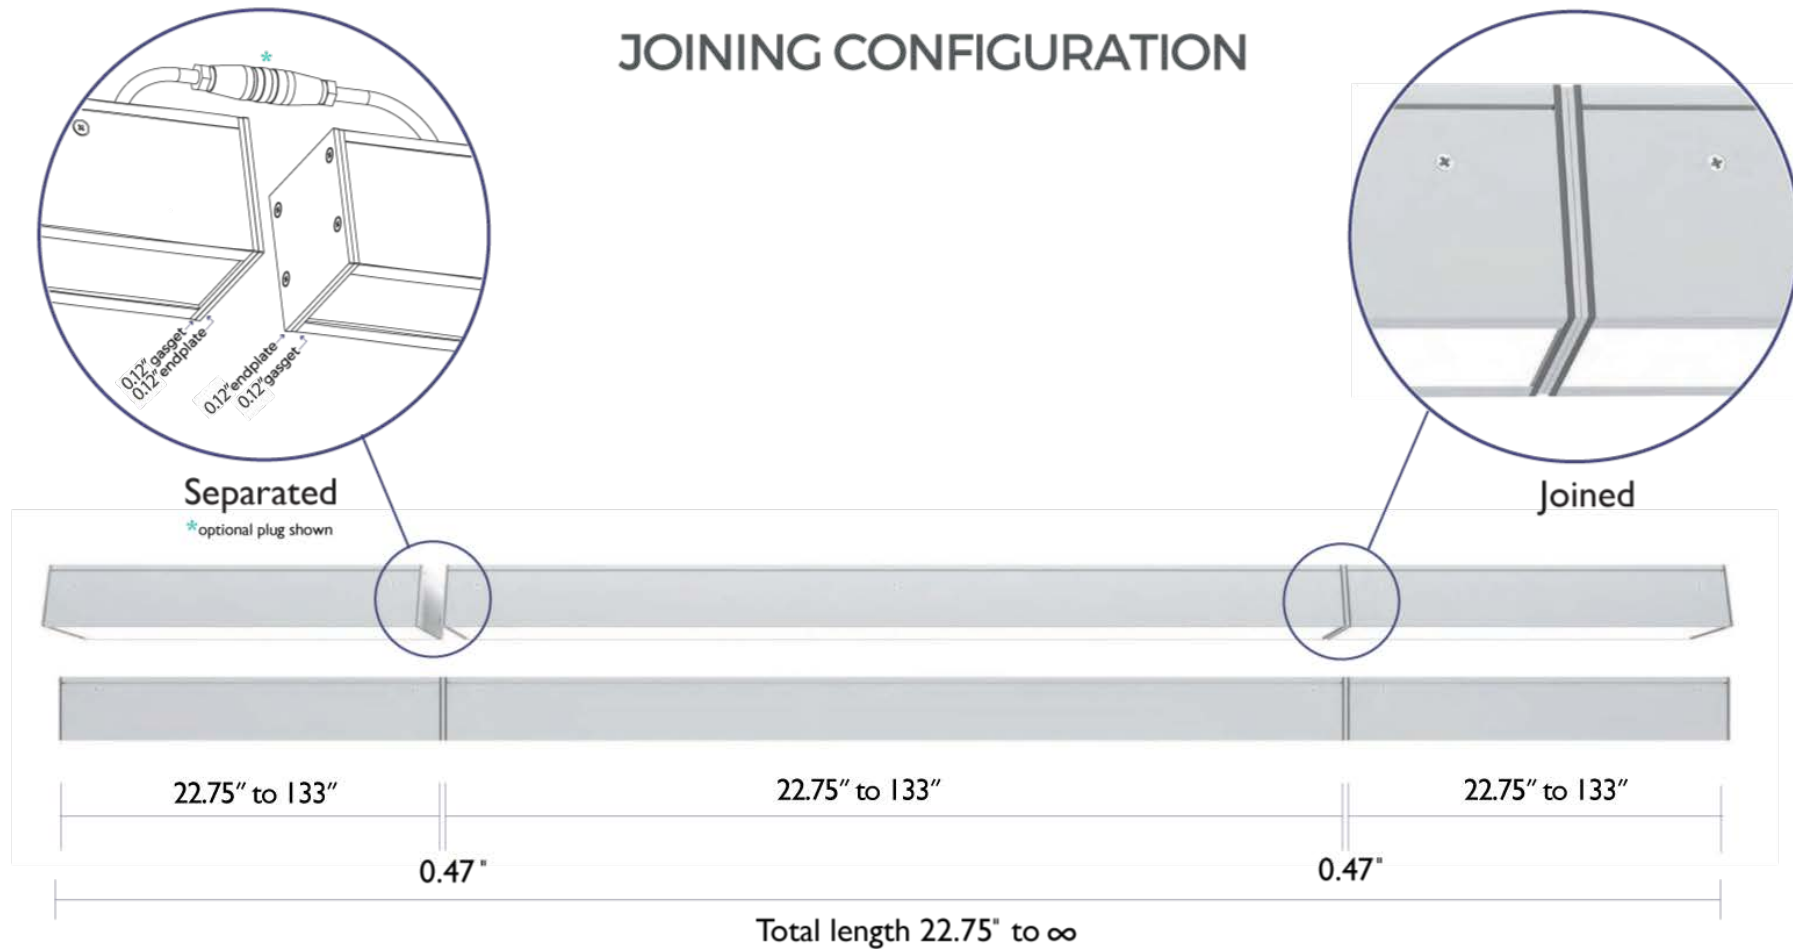


XERO
TECHNOLOGY
INFRASTRUCTURE



XTI | 2.0 Slot
IK11 | IP66

Optical control

XTI profiles come with many diffuser options for glare control in any application




Clear
Polycarbonate




Opal
Polycarbonate



Semi-specular
Louvre



Optic white
louvre




Vandal Proof




emergency packs


MOUNTING

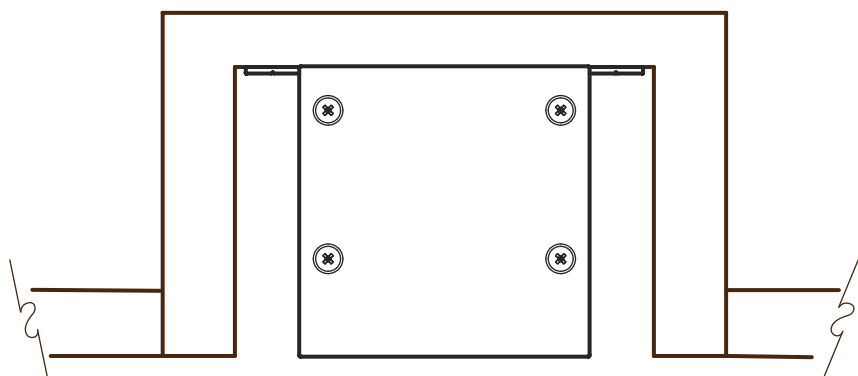


Recessed Mounting
(ceiling trof by others)

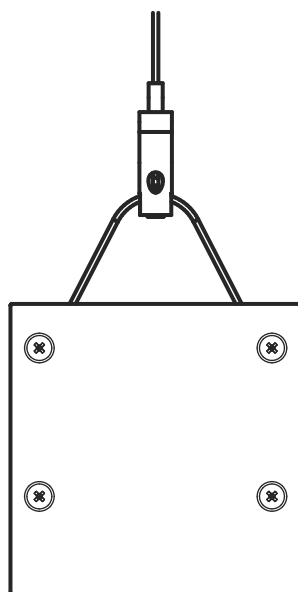


Wire Suspension

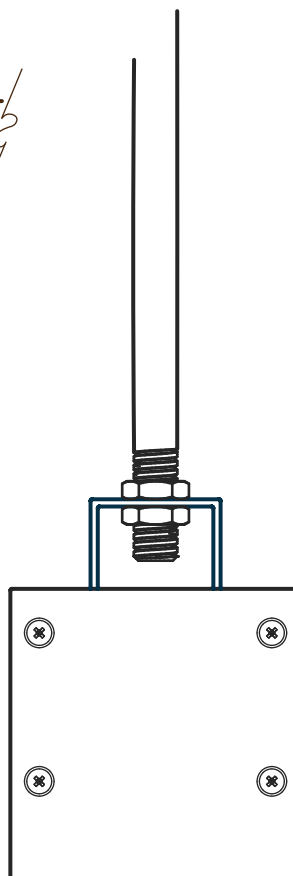

Rod Suspension

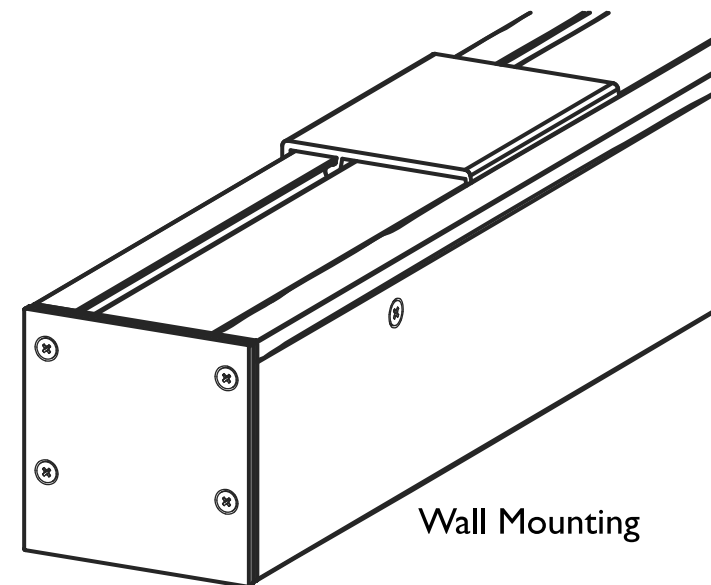

Wall Mounting

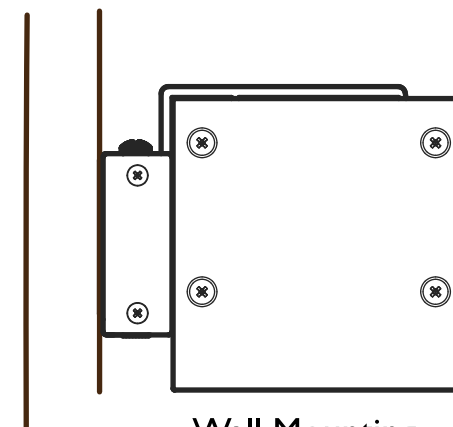

**Wall Mounting
Side View**