



XERO
TECHNOLOGY
INFRASTRUCTURE



XTI | 3.0 Square IKII | IP66

metric

80mm Wide x 80mm High

imperial

3.149" Wide x 3.149" High



DATA TABLE

Output	Xeramix	CRI	80+
		Lumen Maintenance	114,000 Hours (L90 B10 @ 122°F) 1M hours (L70 B10 @ 122°F)
	Proformax S	CRI	90+
		Lumen Maintenance	82,000 Hours (L80 B10 @ 95°F)
	24V RGBW System		Dual Row (DALI / DMX Dimming)
Warranty	Xeramix		Xeramix I = 10 years Xeramix R = 15 years
	Proformax S		7 years
	24V RGBW		3 years
Electrical	Voltage input range		120 – 277V
	Control methods		Dimming options for white light: 0-10V, Dimming options for RGBW: DALI, DMX
	Total harmonic distortion THD		<10% max
	Approvals		UL / CE / CCC / AS:NZS / EMC
Physical	Dimensions		3.14" Wide X 3.14" High
	Weight		2.95lbs weight per feet
	Housing		Aluminium extrusion with powder-coated finish: Standard powder-coated colours are: White / black and silver. Custom powder-coat on request
	Diffuser		Frosted acrylic lens / Louvres available in White, Black, or Silver
	Connections		Polarised electrical connection between sections
	Compatible ceiling type		Suitable for (drywall) ceilings, metal pan, concrete, timber and T-bar grid ceilings
	Mounting		Field adjustable rollerball wire suspensions / rod suspensions
	Joiner options		90° / Straight / 180° / custom
	IK rating		IK11
	Operating temperatures		Proformax S – (-13°F to 95°F) Xeramix – (-13°F to 140°F) 24V RGBW – (4°F to 95°F)
	Environment		Semi Outdoor IP66 (Not in direct sunlight)
	Minimum length adjustment		5.51"
	LED Board types		Xeramix in 0.98" / 3.94" / 11.02" / 22.05" lengths. Zhaga compatible Proformax S in 5.51" / 11.02" / 22.05" lengths. Zhaga compatible
	Vandal-proof		Available with anti-vandal fasteners
	Optional Extras		Lanyards / Emergency packs


XERO
TECHNOLOGY
INFRASTRUCTURE



XTI | 3.0 Square
IK11+ | IP66

Optical control

XTI profiles come with many diffuser options for glare control in any application




Clear
Polycarbonate




Opal
Polycarbonate




Silver Louvre



White Louvre



Black Louvre




Vandal Proof




Emergency Packs


MOUNTING

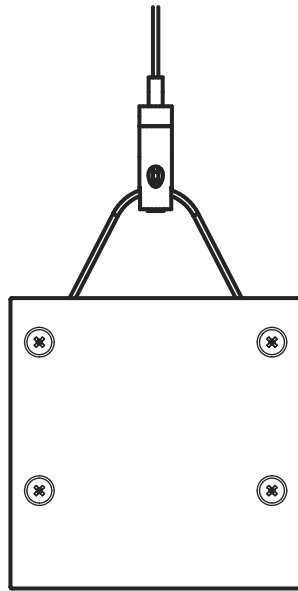


Wire Suspension

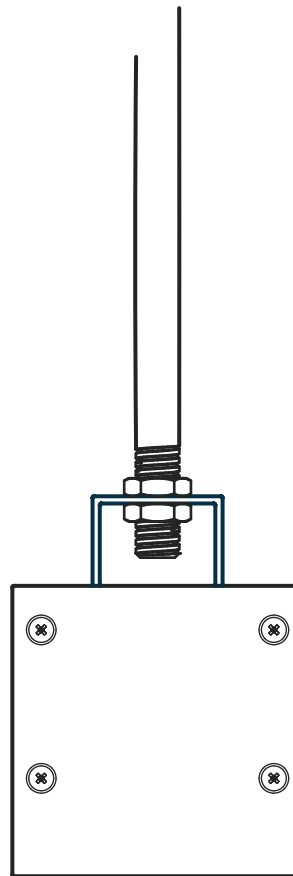

Rod Suspension

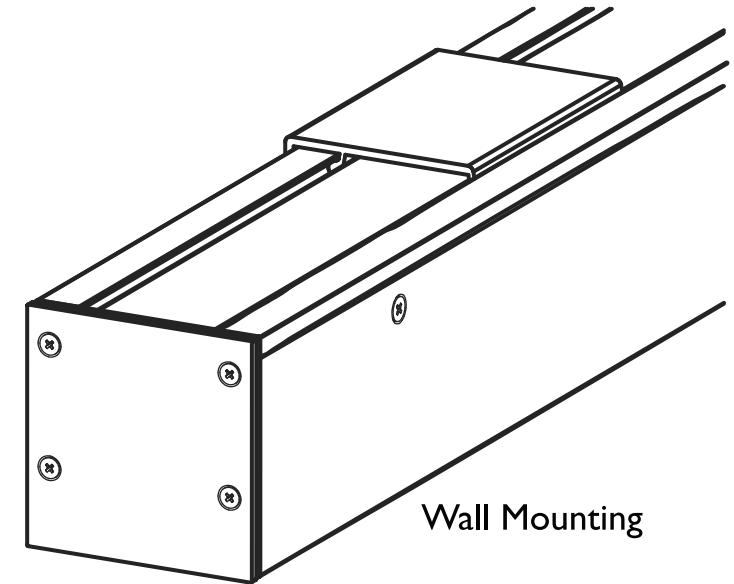

Wall Mounting

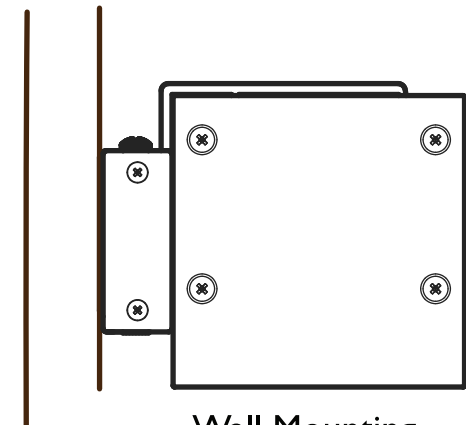

Wall Mounting
Side View