

XERO  
TECHNOLOGY  
ADVANCED 

## XTA | 2.0 Recessed


Size

2.36" Wide (2.87" Wide Inc  
flange) x 2.95" High


## DATA TABLE

<b>Output</b>	CRI	80+
<b>Warranty</b>	Proformax	7 years
<b>Electrical</b>	Voltage input range	120 – 277V
	Control methods	Dimming options for white light: 0-10V, DALI, DMX Optional RGB / Sunset Dimming control DMX or DALI XI
	Total harmonic distortion THD	9.8% max
	Approvals	UL / CE / CCC / AS:NZS / EMC
<b>Physical</b>	Dimensions	2.36" Wide (2.87" inc flange) x 2.95" High
	Weight	2 lbs average weight per foot
	Housing	Aluminium Extrusion with anodised or powder-coated finish Standard colours powder-coated: white/black/silver/ custom on request
	Diffuser	Polycarbonate Opal Diffuser/ Clear Polycarbonate Diffuser / White Louvre / Semi Specular Louvre
	Connections	Speed connect joining system with polarised electrical connection between sections
	Compatible ceiling type	Suitable for drywall ceilings, metal pan, concrete, timber and T bar grid ceilings
	Mounting	Drywall clips as standard
	Joiner options	Lit corner 90° / Cross 90° / Tee 90° / Straight 180° Join
	Operating temperatures	ProformaxS – (-13°F to 140°F)
	Environment	Dry indoor application only IP20
	Minimum length adjustment	5.51"
	LED Board types	ProformaxS boards in 5.51" / 11.02" / 22.0" lengths Zhaga compatible
	Optional Extras	Emergency packs

## side view

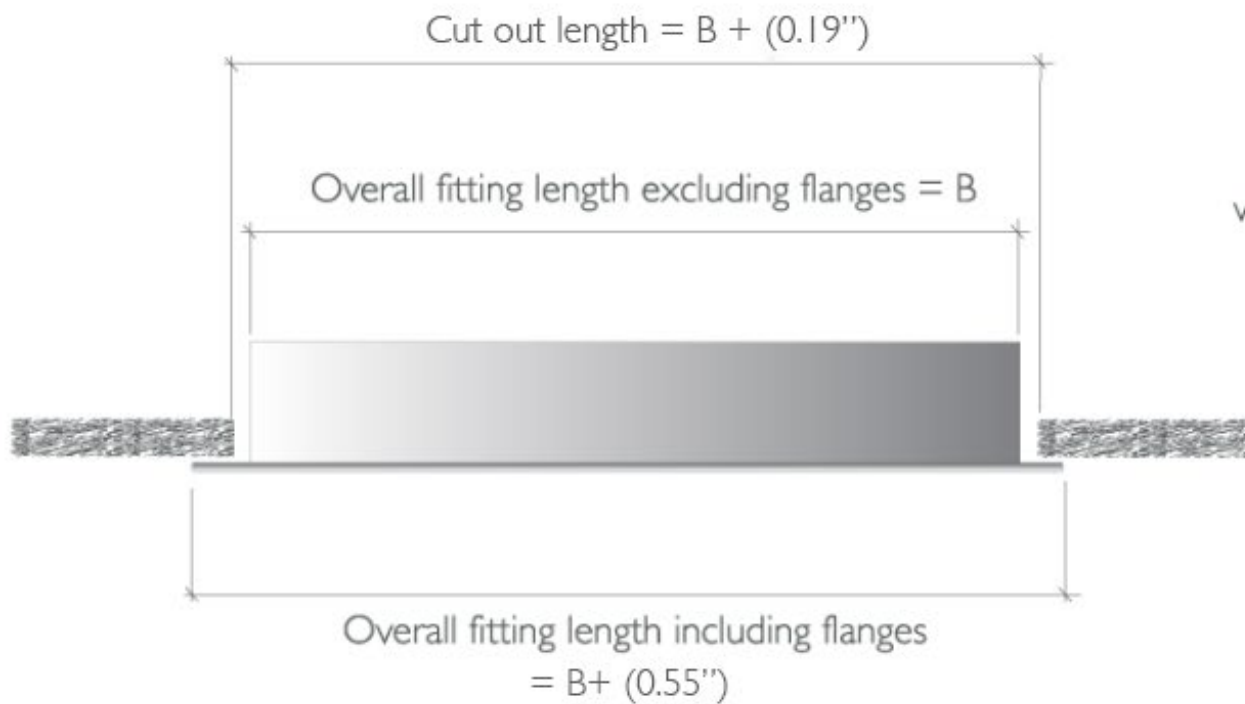

## end view

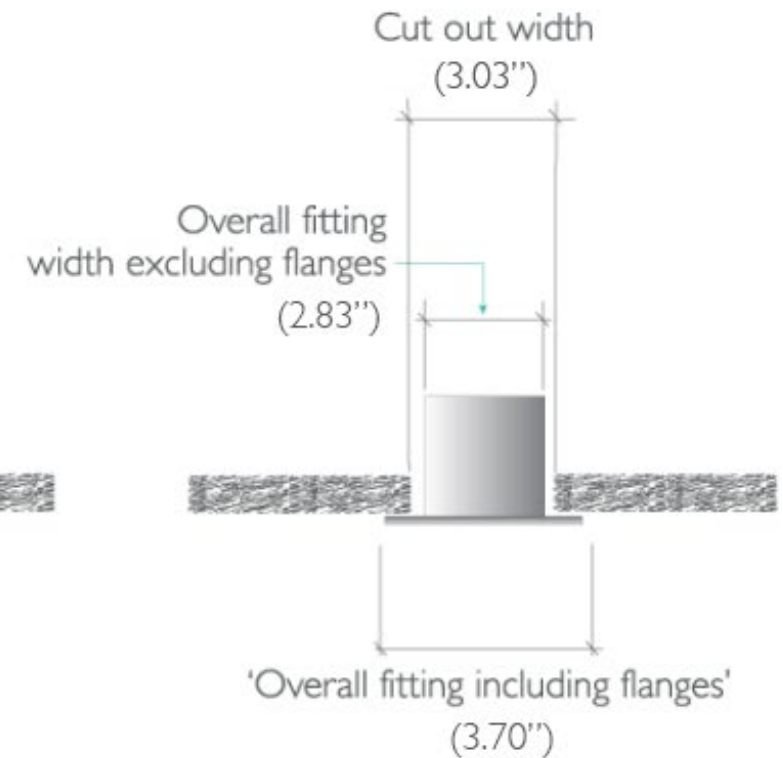


## XTA | 2.0 Recessed indoor series IP20

### Optical control


All XTA profiles come with many diffuser options for glare control in any application



Plexiglass



Microprism



Polycarbonate



Semi specular louvre




Optic white louvre

### Accessories and options



sensors / daylight  
harvesting



emergency packs



downlights

### Bend options



135°



cross 90°



tee 90°



custom



corner 90°



ceiling to wall