



XERO  
TECHNOLOGY  
SPECIFICATION

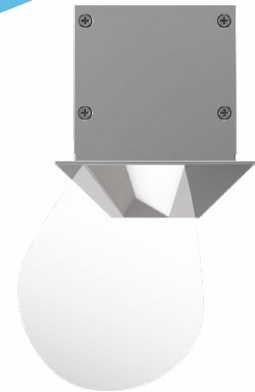

## XTS | 3.5 LD Recessed (Linear Darklighter)

**Size** | 3.54" Wide (inc flanges 4.33")  
x 3.54" High

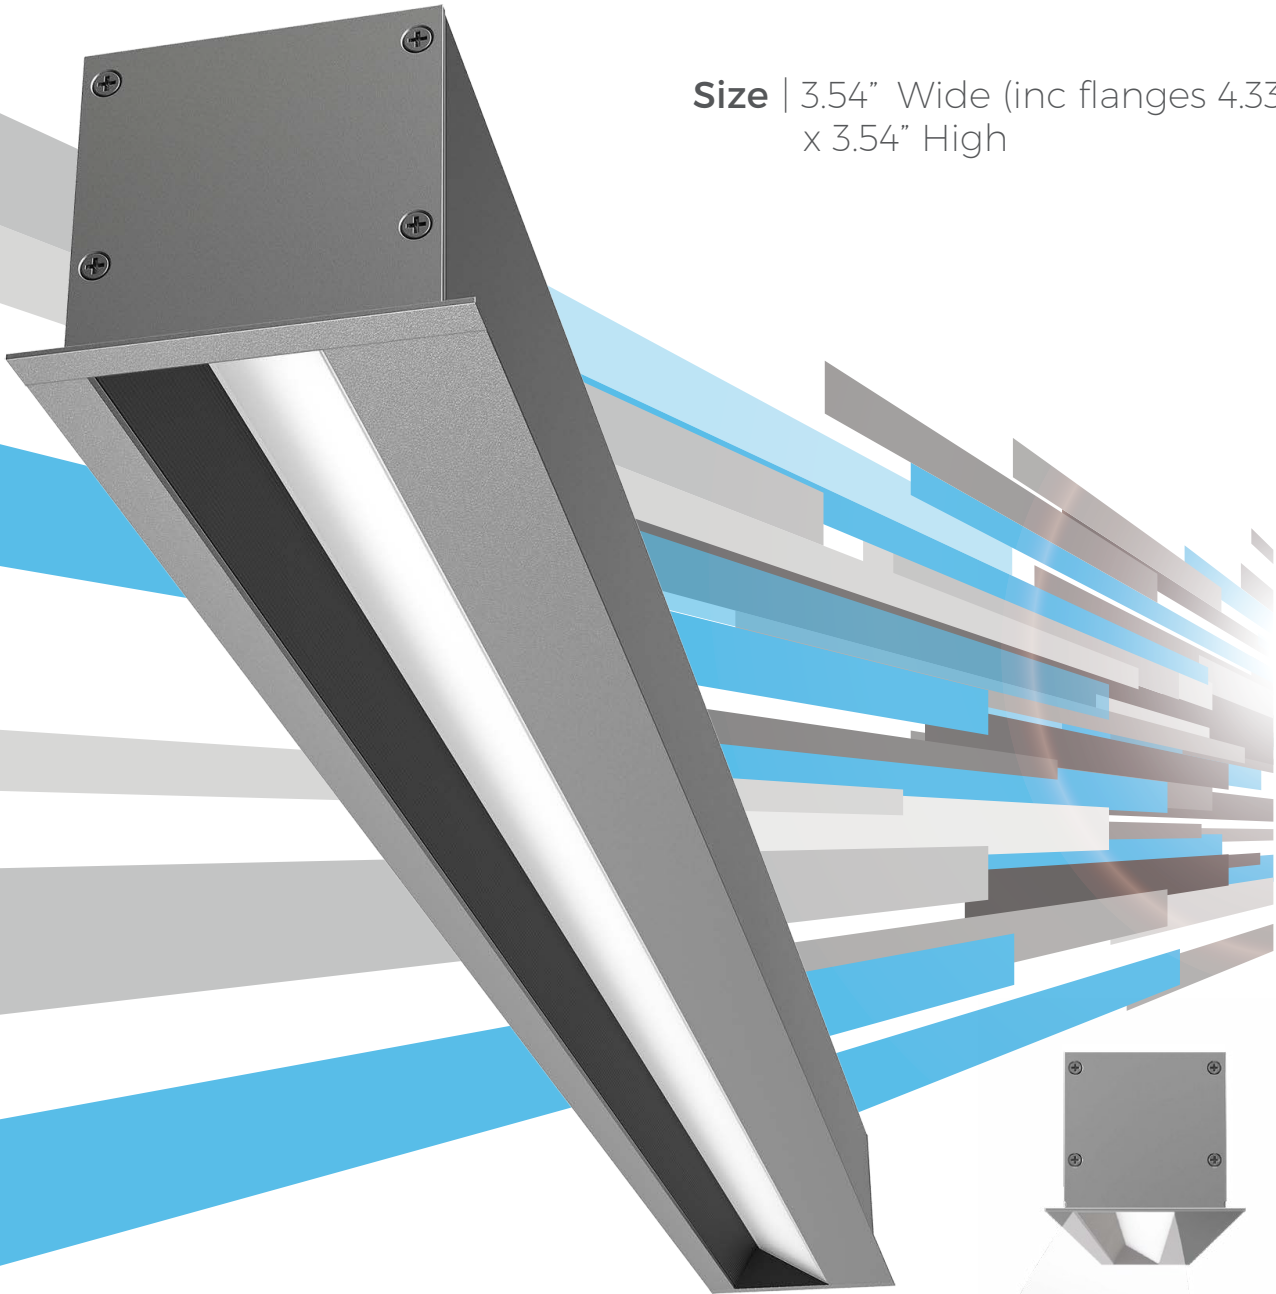

## XTS | 3.5 LD Recessed (Linear Darklighter)

### DATA TABLE

<b>Output</b>	CRI	80+
<b>Warranty</b>	Proformax	7 years
<b>Electrical</b>	Voltage input range	120 – 277V
	Control methods	Dimming options for white light: 0-10V, DALI, DMX Optional RGB / Sunset Dimming control DMX or DALI XI
	Total harmonic distortion THD	9.8% max
	Approvals	UL / CE / CCC / AS:NZS / EMC
<b>Physical</b>	Dimensions	3.54" Wide (4.33" inc flange) x 3.54" High
	Weight	2.35 lbs average weight per foot
	Housing	Aluminium Extrusion with anodised or powder-coated finish Standard colours powder-coated: white/black/silver/ custom on request
	Diffuser	Frosted acrylic lens
	Connections	Speed connect joining system with polarised electrical connection between sections
	Compatible ceiling type	Suitable for drywall ceilings, metal pan, concrete, timber and T bar grid ceilings
	Mounting	Surface Mounting / Custom Mounting / Rod Suspension / Wall Mounting
	Joiner options	Lit corner 90° / Cross 90° / Tee 90° / Straight 180° Join
	Operating temperatures	ProformaxS – (-13°F to 140°F)
	Environment	Dry indoor application only IP20
	Minimum length adjustment	5.51"
	LED Board types	ProformaxS boards in 5.51" / 11.02" / 22.0" lengths Zhaga compatible
	Optional Extras	Emergency packs
	Endplates	Screwed endplates (standard) Screwless endplates (optional) Polarised electrical connection between sections Frosted acrylic lens
	Optional Extras	Ba e – Low glare black ba e as standard / Optional coloured ba e

## XTS | 3.5 LD Recessed (Darklighter)

### Bend Options



135°



cross 90°



Tee 90°



custom



corner 90°

### Optical Control



plexiglass

### Accessories and options



emergency packs

### Axis geartray

This truly unique innovation adopts our revolutionary cam lock for quick and simple 'single person' installation. The system is also 'future proofed' by having the ability to easily upgrade as LED technology rapidly advances.

