


## INSTALLATION INSTRUCTION

- 1 Ceiling Mount
- 2 Tube Top
- 3 Tube
- 4 Tube Bottom Connector
- 5 Lock Nuts
- 6 Suspension Saddle
- 7 Luminaire

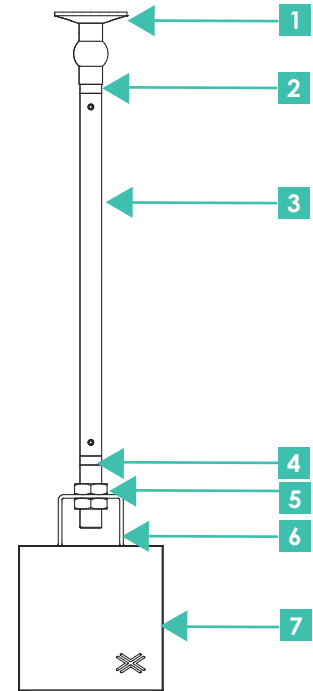

**1 Identify all parts**

lock nuts  
spring pins  
suspension saddle  
ceiling mount  
tube top  
tube bottom connector  
1 x tube 78  
1 x tube 157  
suspension plan

*note: either 78" or 157" rod supplied*

**Determine mounting location**

**3**

Determine required **height** to the top of the luminaire

**4** **OPTIONAL FOR NON STANDARD ROD LENGTHS**

Cut tube to length.  
Length = **height** (less 3.74")

**5** **OPTIONAL FOR NON STANDARD ROD LENGTHS**

At the lower end of the tube, drill a 1/8" hole through it's diameter, 0.29" from the end

**6**

Assemble bottom rod components. (Push the pin into the bottom connector hole).

Note: Leave off the suspension saddle and lower lock nut

**7**

Fix the rod assemblies at the pre-determined locations

**8**

Remove the luminaire's outer end cap

**9**

Slide suspension saddles along the fitting to align with the rod assemblies and replace outer end cap

**10**

Ensure a maximum of 118" between rods is maintained

Lift the luminaire in to position and secure with lower lock nut

Ensure the luminaire is level by adjusting the lock nuts at each suspension location